




SFAF801G - SFAF808G
8.0AMPS. Isolated Glass Passivated Super Fast Rectifiers
ITO-220AC

Features

- ✦ UL Recognized File # E-326243
- ✦ High efficiency, low VF.
- ✦ High current capability
- ✦ High reliability
- ✦ High surge current capability
- ✦ Low power loss.
- ✦ For use in low voltage, high frequency inverter, free wheeling, and polarity protection application
- ✦ Green compound with suffix "G" on packing code & prefix "G" on datecode.


Mechanical Data

- ✦ Cases: ITO-220AC molded plastic
- ✦ Epoxy: UL 94V-0 rate flame retardant
- ✦ Terminals: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- ✦ Polarity: As marked
- ✦ High temperature soldering guaranteed: 260°C/10 seconds 0.25".,(6.35mm) from case.
- ✦ Weight: 1.7 grams
- ✦ Mounting torque: 5 in - 1bs. Max.

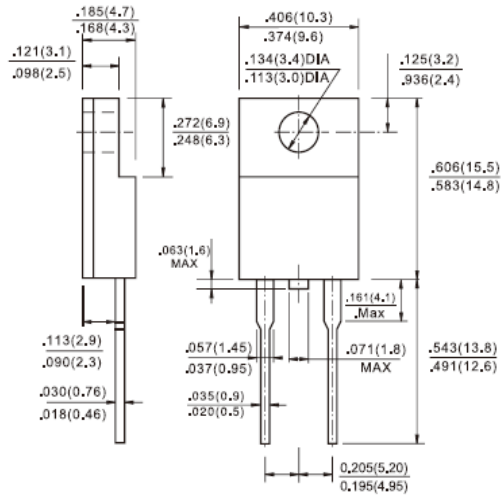

Dimensions in inches and (millimeters)

Marking Diagram



- SFAF80XG = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

Type Number	Symbol	SFAF 801G	SFAF 802G	SFAF 803G	SFAF 804G	SFAF 805G	SFAF 806G	SFAF 807G	SFAF 808G	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	350	420	V
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	500	600	V
Maximum Average Forward Rectified Current @ $T_c=100^\circ C$	$I_{F(AV)}$	8								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	125								A
Maximum Instantaneous Forward Voltage (Note 1) @ 8 A	V_F	0.95			1.3		1.7			V
Maximum DC Reverse Current @ $T_A=25^\circ C$ at Rated DC Blocking Voltage @ $T_A=100^\circ C$	I_R					10				uA
						400				uA
Maximum Reverse Recovery Time (Note 2)	T_{rr}					35				nS
Typical Junction Capacitance (Note 3)	C_j	90			60					pF
Typical Thermal Resistance (Note 4)	$R_{\theta JC}$	4								°C/W
Operating Temperature Range	T_J	- 65 to + 150								°C
Storage Temperature Range	T_{STG}	- 65 to + 150								°C

Note 1: Pulse Test with PW=300 usec, 1% Duty Cycle
 Note 2: Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$.
 Note 3: Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.
 Note 4: Mounted on Heatsink Size of 2" x 3" x 0.25" Al-Plate.

RATINGS AND CHARACTERISTIC CURVES (SFAF801G THRU SFAF808G)

FIG. 1- MAXIMUM FORWARD CURRENT DERATING CURVE

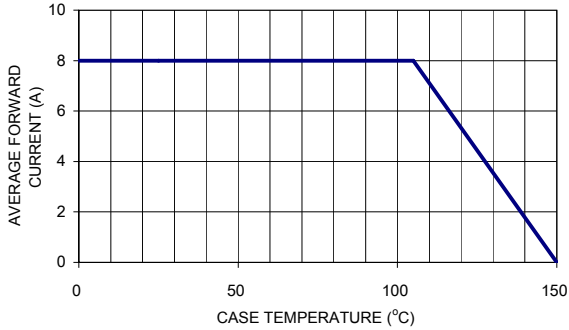


FIG. 2- TYPICAL REVERSE CHARACTERISTICS

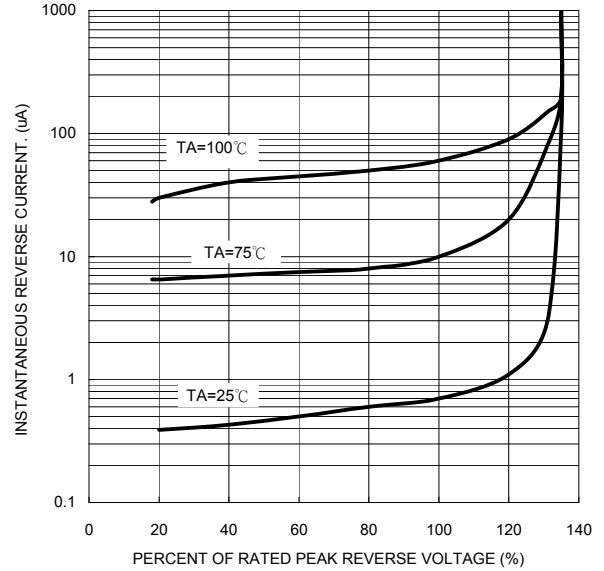


FIG. 3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

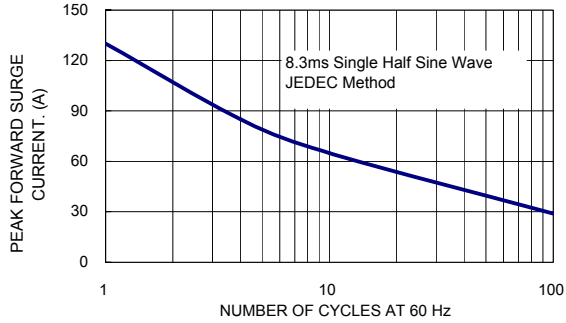


FIG. 5- TYPICAL FORWARD CHARACTERISTICS

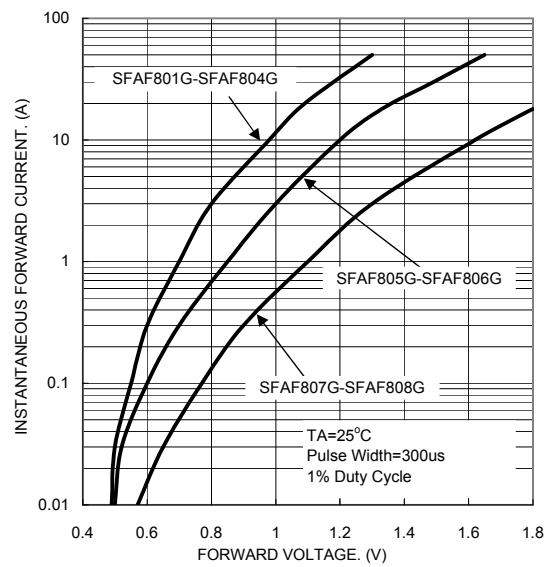


FIG. 4- TYPICAL JUNCTION CAPACITANCE

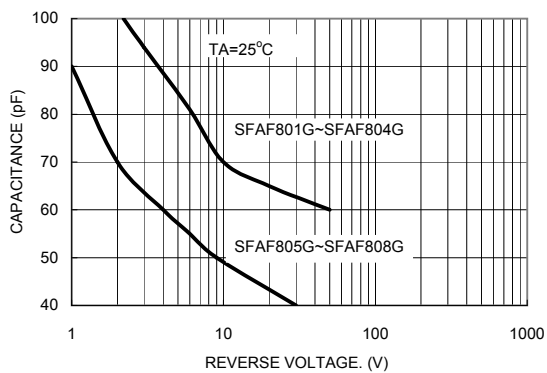


FIG. 6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

