




Features

- ◊ Zener voltage range 3.3V to 56 V
- ◊ MELF Package (JEDEC DO-213AB)
- ◊ Surface mount devices (SMD).
- ◊ Hermetically sealed glass
- ◊ Compression bonded construction
- ◊ All external surfaces are corrosion resistant and terminals are readily solderable
- ◊ RoHS compliant
- ◊ Matte Tin (Sn) lead finish
- ◊ Color band indicates negative polarity

ZM4728A - ZM4758A

1.0 Watt Hermetically Sealed Glass Zener Voltage Regulators

MELF

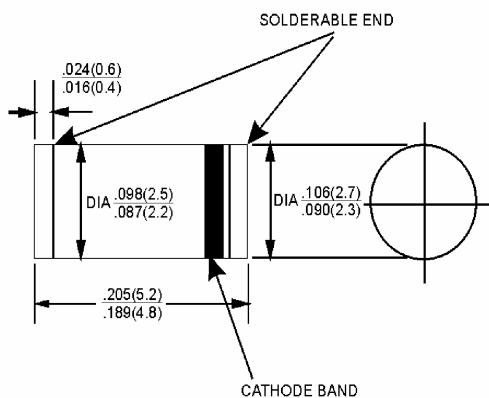

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Maximum Ratings

| Type Number | Symbol | Value | Units |
|--|------------------|--------------|-------|
| Power Dissipation | Pd | 1.0 | W |
| Thermal Resistance Junction to Ambient | R _{θJA} | 170 | °C/W |
| Storage Temperature Range | T _{STG} | -65 to + 200 | °C |
| Operating Temperature Range | T _J | 175 | °C |

These ratings are limiting values above which the serviceability of the diode may be impaired.

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

| Type Number | V _Z @ I _{ZT} (Volts) Nominal | I _{ZT} mA | Z _{ZT} @ I _{ZT} Ohms Max | I _{ZK} mA | Z _{ZK} @ I _{ZK} Ohms | IR @ VR uA Max | VR V |
|-------------|--|-----------------------|--|-----------------------|---|----------------------|---------|
| ZM4728A | 3.3 | 76 | 10 | 1.0 | 400 | 100 | 1.0 |
| ZM4729A | 3.6 | 69 | 10 | 1.0 | 400 | 100 | 1.0 |
| ZM4730A | 3.9 | 64 | 9 | 1.0 | 400 | 50 | 1.0 |
| ZM4731A | 4.3 | 58 | 9 | 1.0 | 400 | 10 | 1.0 |
| ZM4732A | 4.7 | 53 | 8 | 1.0 | 500 | 10 | 1.0 |
| ZM4733A | 5.1 | 49 | 7 | 1.0 | 550 | 10 | 1.0 |
| ZM4734A | 5.6 | 45 | 5 | 1.0 | 600 | 10 | 2.0 |
| ZM4735A | 6.2 | 41 | 2 | 1.0 | 700 | 10 | 3.0 |
| ZM4736A | 6.8 | 37 | 3.5 | 1.0 | 700 | 10 | 4.0 |
| ZM4737A | 7.5 | 34 | 4.0 | 0.5 | 700 | 10 | 5.0 |
| ZM4738A | 8.2 | 31 | 4.5 | 0.5 | 700 | 10 | 6.0 |
| ZM4739A | 9.1 | 28 | 5.0 | 0.5 | 700 | 10 | 7.0 |
| ZM4740A | 10 | 25 | 7.0 | 0.25 | 700 | 10 | 7.6 |
| ZM4741A | 11 | 23 | 8.0 | 0.25 | 700 | 5.0 | 8.4 |
| ZM4742A | 12 | 21 | 9.0 | 0.25 | 700 | 5.0 | 9.1 |
| ZM4743A | 13 | 19 | 10 | 0.25 | 700 | 5.0 | 9.9 |
| ZM4744A | 15 | 17 | 14 | 0.25 | 700 | 5.0 | 11.4 |
| ZM4745A | 16 | 15.5 | 16 | 0.25 | 700 | 5.0 | 12.2 |
| ZM4746A | 18 | 14.0 | 20 | 0.25 | 700 | 5.0 | 13.7 |
| ZM4747A | 20 | 12.5 | 22 | 0.25 | 750 | 5.0 | 15.2 |
| ZM4748A | 22 | 11.5 | 23 | 0.25 | 750 | 5.0 | 16.7 |
| ZM4749A | 24 | 10.5 | 25 | 0.25 | 750 | 5.0 | 18.2 |
| ZM4750A | 27 | 9.5 | 35 | 0.25 | 750 | 5.0 | 20.6 |
| ZM4751A | 30 | 8.5 | 40 | 0.25 | 1000 | 5.0 | 22.8 |
| ZM4752A | 33 | 7.5 | 45 | 0.25 | 1000 | 5.0 | 25.1 |
| ZM4753A | 36 | 7.0 | 50 | 0.25 | 1000 | 5.0 | 27.4 |
| ZM4754A | 39 | 6.5 | 60 | 0.25 | 1000 | 5.0 | 29.7 |
| ZM4755A | 43 | 6.0 | 70 | 0.25 | 1500 | 5.0 | 32.7 |
| ZM4756A | 47 | 5.5 | 80 | 0.25 | 1500 | 5.0 | 35.8 |
| ZM4757A | 51 | 5.0 | 95 | 0.25 | 1500 | 5.0 | 38.8 |
| ZM4758A | 56 | 4.5 | 110 | 0.25 | 2000 | 5.0 | 42.6 |

- Notes:
1. The device numbers listed have a standard tolerance on the nominal zener voltage of $\pm 5\%$.
 2. For detailed information on price, availability and delivery of nominal zener voltages between the voltages shown and tighter voltage tolerances.
 3. The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (I_{ZT} or I_{ZK}) is superimposed to I_{ZT} or I_{ZK} .