



KBU601 - KBU607

Single Phase 6.0AMPS. Bridge Rectifiers


KBU

Features


- ✧ UL Recognized File # E-326243
- ✧ Ideal for printed circuit board
- ✧ High case dielectric strength
- ✧ Plastic material has Underwriters Laboratory flammability Classification 94V-0
- ✧ Typical IR less than 0.1uA
- ✧ High surge current capability
- ✧ High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs.,(2.3kg) tension
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode

Mechanical Data

- ✧ Case: Molded plastic body
- ✧ Terminals: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208
- ✧ Weight: 8.0 grams
- ✧ Mounting Torque: 5 in lbs max.

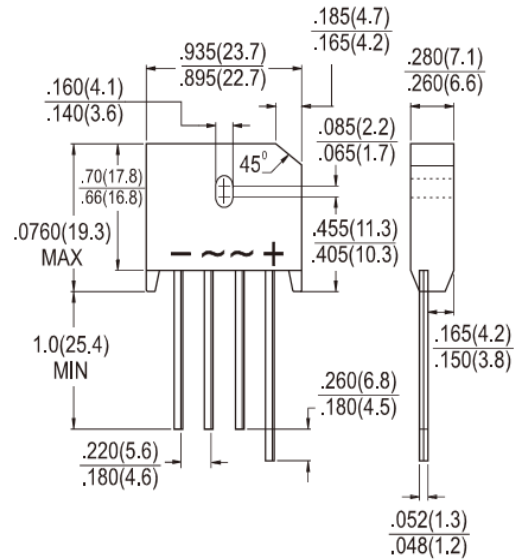

Dimensions in inches and (millimeters)



Marking Diagram

- KBU60X = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	KBU 601	KBU 602	KBU 603	KBU 604	KBU 605	KBU 606	KBU 607	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_A=65^\circ\text{C}$	$I_{F(AV)}$	6							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	200							A
Rating of fusing (t<8.3mS)	I^2t	166							A ² S
Maximum Instantaneous Forward Voltage (Note 1) @ 3 A @ 6 A	V_F	1.0 1.1							V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	I_R	10 500							uA
Typical Junction Capacitance per leg (Note 2)	C_j	240							pF
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$ $R_{\theta JC}$	8.6 3.1							°C/W
Operating Temperature Range	T_J	- 55 to + 125							°C
Storage Temperature Range	T_{STG}	- 55 to + 150							°C

Note 1 : Pulse Test with PW=300u sec, 1% Duty Cycle

Note 2 : Measured at 1MHz and applied Reverse Voltage of 4.0V D.C.

Note 3 : Unit case mounted on 2" x 3" x 0.25" Al plate heat sink.

RATINGS AND CHARACTERISTIC CURVES (KBU601 THRU KBU607)

FIG.1 MAXIMUM DEARTING CURVE FOR OUTPUT CURRENT

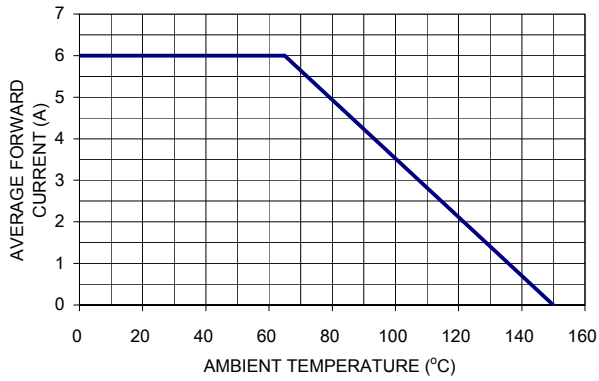


FIG. 2 MAXIMUM FORWARD SURGE CURRENT PER LEG

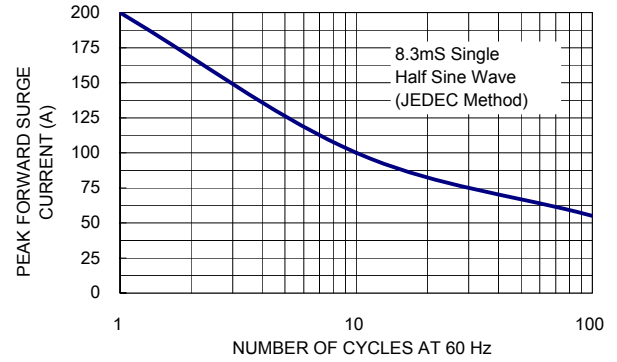


FIG. 3 TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

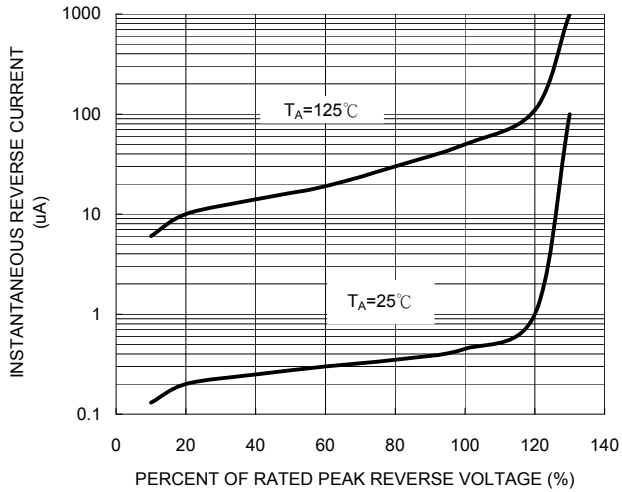


FIG. 4- TYPICAL FORWARD CHARACTERISRICS PER LEG

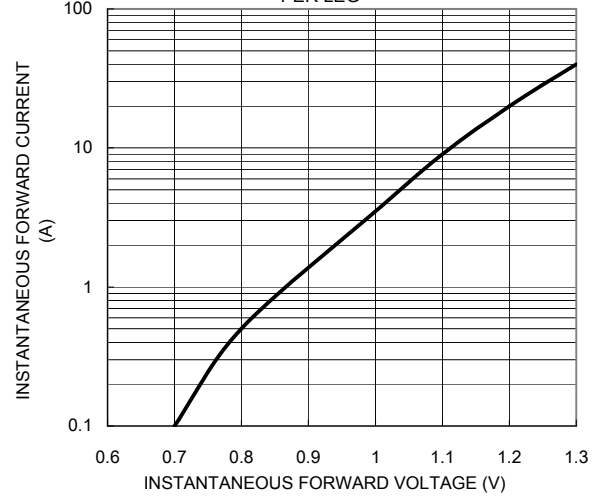


FIG. 5 TYPICAL JUNCTION CAPACITANCE

