


**Pin Definition:**


- |           |            |
|-----------|------------|
| 1. Anode  | 8. Cathode |
| 2. Anode  | 7. Cathode |
| 3. Source | 6. Drain   |
| 4. Gate   | 5. Drain   |

**MOSFET PRODUCT SUMMARY**

$V_{DS}$ (V)	$R_{DS(on)}$ (m $\Omega$ )	$I_D$ (A)
30	55 @ $V_{GS} = 10V$	4
	65 @ $V_{GS} = 4.5V$	2

**SCHOTTKY PRODUCT SUMMARY**

$V_{RRM}$ (V)	$V_F$ (V)	$I_F$ (A)
30	0.51	3

**Block Diagram**


N-Channel MOSFET with Schottky Diode

**Features**

- Advance Trench Process Technology
- High Density Cell Design for Ultra Low On-resistance

**Application**

- Load Switch
- PA Switch

**Ordering Information**

Part No.	Package	Packing
TSM414K34CS RLG	SOP-8	2.5Kpcs / 13" Reel

**Note:** "G" denote for Halogen Free Product

**MOSFET Absolute Maximum Rating** ( $T_a = 25^\circ C$  unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{DS}$	30	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Continuous Drain Current, $V_{GS}$	$I_D$	4	A
Pulsed Drain Current,	$I_{DM}$	20	A
Continuous Source Current (Diode Conduction) <sup>a,b</sup>	$I_S$	4	A
Maximum Power Dissipation @ $T_a = 25^\circ C$	$P_D$	2	W
Operating Junction Temperature	$T_J$	+150	$^\circ C$
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 ~ +150	$^\circ C$

**Schottky Absolute Maximum Rating** ( $T_a = 25^\circ C$  unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	$V_{RRM}$	30	V
Average Forward Current	$I_F$	3	A
Non-Peak Repetitive Surge Current <sup>c</sup>	$I_{FSM}$	20	A

**Thermal Performance**

Parameter	Symbol	Limit	Unit
Junction to Ambient Thermal Resistance	$R_{\theta JA}$	62.5	$^\circ C/W$

**Notes:**

- Pulse width limited by the Maximum junction temperature
- Surface Mounted on FR4 Board using 1 inch sq pad size,  $t \leq 10$  sec.
- Surge Applied at Rated Load Conditions, Half-Wave, Single Phase, 60Hz.

### MOSFET Electrical Specifications (Ta = 25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
<b>Static</b>						
Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	$BV_{DSS}$	30	--	--	V
Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	$V_{GS(TH)}$	1	1.4	3	V
Gate Body Leakage	$V_{GS} = \pm 20V, V_{DS} = 0V$	$I_{GSS}$	--	--	$\pm 100$	nA
Zero Gate Voltage Drain Current	$V_{DS} = 24V, V_{GS} = 0V$	$I_{DSS}$	--	--	1.0	$\mu A$
On-State Drain Current <sup>a</sup>	$V_{DS} \geq 5V, V_{GS} = 10V$	$I_{D(ON)}$	30	--	--	A
Drain-Source On-State Resistance <sup>a</sup>	$V_{GS} = 10V, I_D = 4A$	$R_{DS(ON)}$	--	30	45	m $\Omega$
	$V_{GS} = 4.5V, I_D = 2A$		--	40	55	
Forward Transconductance <sup>a</sup>	$V_{DS} = 5V, I_D = 4A$	$g_{fs}$	--	20	--	S
Diode Forward Voltage	$I_S = 4A, V_{GS} = 0V$	$V_{SD}$	--	1	1.2	V
<b>Dynamic<sup>b</sup></b>						
Total Gate Charge	$V_{DS} = 15V, I_D = 4A,$ $V_{GS} = 10V$	$Q_g$	--	13	--	nC
Gate-Source Charge		$Q_{gs}$	--	4.2	--	
Gate-Drain Charge		$Q_{gd}$	--	3.1	--	
Input Capacitance	$V_{DS} = 15V, V_{GS} = 0V,$ $f = 1.0MHz$	$C_{iss}$	--	610	--	pF
Output Capacitance		$C_{oss}$	--	100	--	
Reverse Transfer Capacitance		$C_{rss}$	--	77	--	
<b>Switching<sup>c</sup></b>						
Turn-On Delay Time	$V_{DD} = 15V, R_L = 15\Omega,$ $I_D = 1A, V_{GEN} = 10V,$ $R_G = 6\Omega$	$t_{d(on)}$	--	9.1	--	nS
Turn-On Rise Time		$t_r$	--	16.5	--	
Turn-Off Delay Time		$t_{d(off)}$	--	23	--	
Turn-Off Fall Time		$t_f$	--	3.5	--	


### Schottky Electrical Specifications (Ta = 25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Forward Voltage Drop	$I_F = 3A$	$V_{FM}$	--	--	0.51	V
Reverse Leakage Current	$V_R = 30V, Ta = 25^\circ C$	$I_R$	--	--	0.05	mA
	$V_R = 30V, Ta = 100^\circ C$		--	--	18	
Voltage Rate of Charge	$V_R = 30V$	$dv/dt$	--	10000	--	V/us

#### Notes:

- Pulse test:  $PW \leq 300\mu S$ , duty cycle  $\leq 2\%$
- For DESIGN AID ONLY, not subject to production testing.
- Switching time is essentially independent of operating temperature.

### SOP-8 Mechanical Drawing

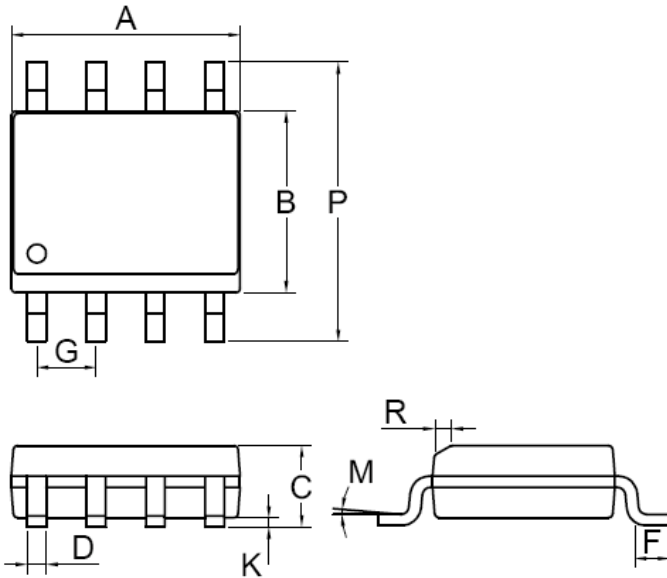

SOP-8 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX.
A	4.80	5.00	0.189	0.196
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27BSC		0.05BSC	
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019

### Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.