


Home Phone Networking Transformer



- Matched to Coppegate's HPNA3 chipset
- Small form factor
- For use in Gateways, Set-Top Boxes, and ONTs
- Excellent return loss

Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C



Part Number	Turns Ratio (±2%) (1-4):(5-8)	Inductance (@ 100kHz, 0.1Vrms)	Leakage Inductance (@ 100kHz, 0.1Vrms) (1-4) with (5-8) shorted	DC Resistance (1-4)	DC Resistance (5-8)	Interwinding Capacitance (@ 100kHz, 0.1Vrms)	Isolation Voltage (Vrms)
B6104NL	1:1	100µH MIN	0.5µH MAX	0.50Ω MAX	0.50Ω MAX	20pF MAX	1500
B6105NL	1.33:1	177µH MIN	0.5µH MAX	0.60Ω MAX	0.40Ω MAX	15pF MAX	1500
B6106NL	1.15:1	177µH MIN	0.5µH MAX	0.60Ω MAX	0.40Ω MAX	15pF MAX	1500

Notes: Transformers are shipped in tubes, unless Tape & Reel packaging is specified by adding a "T" suffix to the part number (ex: B6104NLT).

Mechanical

Schematic

B6104NL / B6105NL / B6106NL

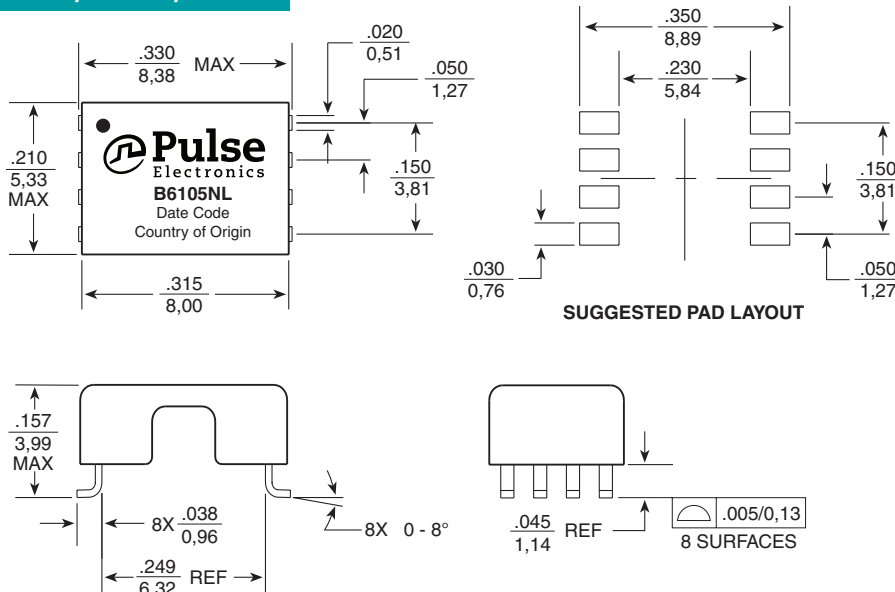

Weight0.2 grams

Tape & Reel95/reel

Tube300/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are $\pm \frac{.010}{.025}$

For More Information

Pulse Worldwide Headquarters
 12220 World Trade Drive
 San Diego, CA 92128
 U.S.A.

Pulse Europe
 Einsteinstrasse 1
 D-71083 Herrenberg
 Germany

Pulse China Headquarters
 B402, Shenzhen Academy of
 Aerospace Technology Bldg.
 10th Kejinan Road
 High-Tech Zone
 Nanshan District
 Shenzhen, PR China 518057
 Tel: 86 755 33966678
 Fax: 86 755 33966700

Pulse North China
 Room 2704/2705
 Super Ocean Finance Ctr.
 2067 Yan An Road West
 Shanghai 200336
 China
 Tel: 86 21 62787060
 Fax: 86 2162786973

Pulse South Asia
 135 Joo Seng Road
 #03-02
 PM Industrial Bldg.
 Singapore 368363
 Tel: 65 6287 8998
 Fax: 65 6287 8998

Pulse North Asia
 3F, No. 198
 Zhongyuan Road
 Zhongli City
 Taoyuan County 320
 Taiwan R. O. C.
 Tel: 886 3 4356768
 Fax: 886 3 4356823 (Pulse)
 Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2012. Pulse Electronics, Inc. All rights reserved.