


64 KBPS INTERFACE TRANSFORMERS

Designed for G.703 Codirectional Interface

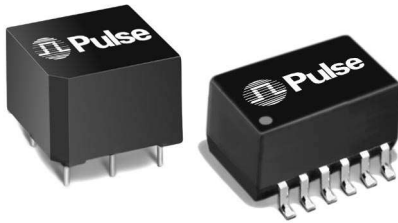


- Single and dual transformer modules for ITU G.703 codirectional applications
- Transformers matched to the integrated circuit
- Provide 1500 Vrms minimum isolation



Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

Part Number	Turns Ratio (±3%)	OCL (mH MIN)	LL (μH MAX)	Cw/w (pF MAX)	DCR pri (Ω MAX)	DCR sec (Ω MAX)	Package/Schematic	Matched To
PE-65535NL	1:2CT	20.0	5.0	130	2.65	5.0	IS/5	EXAR XR6164 XR-T6165, XR-T6166
PE-65540NL	1CT:1	10.0	5.0	100	2.60	2.6	IS/6	—
T7015NL	1:2CT & 1:2CT	20.0	5.0	130	2.80	5.6	AN/1	—

Mechanicals

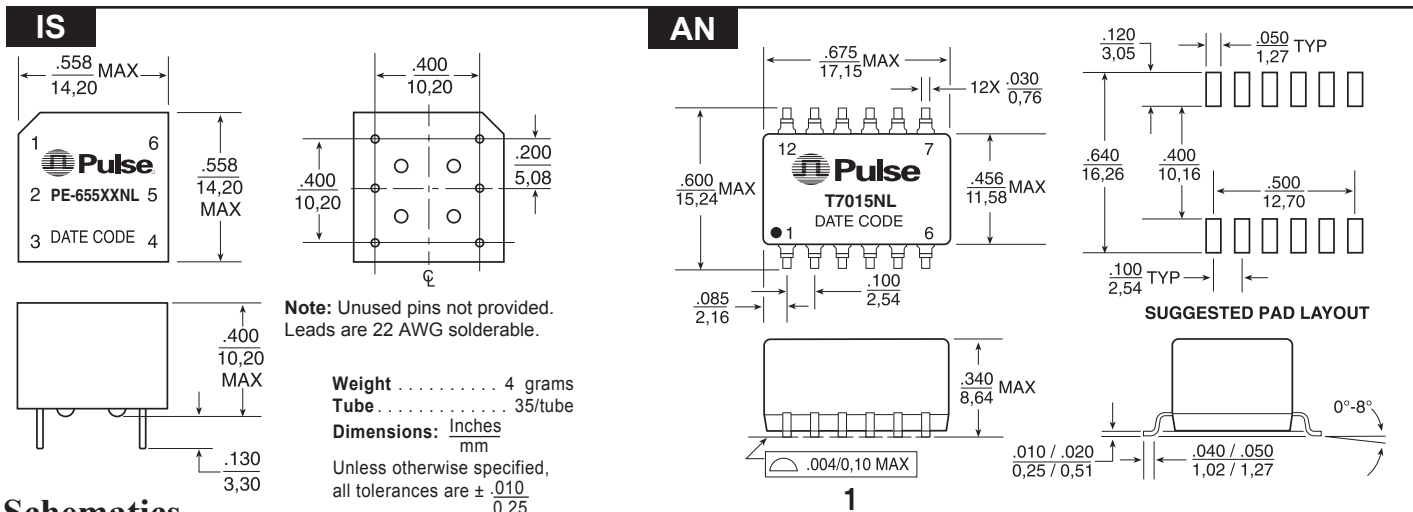

Schematics

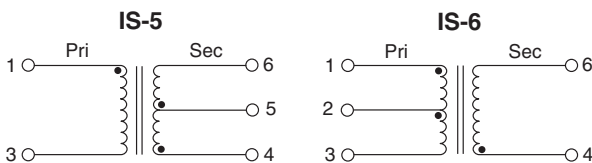

The CCITT recommendations G.703 describe the physical and electrical characteristics of digital interfaces at 64 Kbps. PE-65535NL listed above has been designed for the codirectional interface and matches the driver/receiver chips from EXAR

(XR6164, XR-T6165, and XR-T6166). The characteristics of these transformers allow the pulse to comply with the pulse masks in the 120 Ω system.

For More Information :

Pulse Worldwide Headquarters 12220 World Trade Dr. San Diego, CA 92128 U.S.A. www.pulseeng.com Tel: 858 674 8100 Fax: 858 674 8262	Pulse Europe Einsteinstrasse 1 D-71083 Herrnberg Germany Tel: 49 7032 7806 0 Fax: 49 7032 7806 135	Pulse China Headquarters B402, Shenzhen Academy of Aerospace Technology Bldg. 10th Kejianan Rd. High-Tech Zone Nanshan District Shenzhen, PR China 518057 Tel: 86 755 33966678 Fax: 86 755 33966700	Pulse North China Room 2704/2705 Super Ocean Finance Ctr. 2067 Yan An Rd. West Shanghai 200336 China Tel: 86 21 62787060 Fax: 86 2162786973	Pulse South Asia 135 Joo Seng Rd. #03-02 PM Industrial Bldg. Singapore 368363 Tel: 65 6287 8998 Fax: 65 6287 8998	Pulse North Asia 3F, No. 198 Zhongyuan Rd. Zhongli City Taoyuan County 320 Taiwan R. O. C. Tel: 886 3 4356768 Fax: FRE 886 3 4356820 Pulse: 886 3 4356823
--	--	--	---	--	--

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.