The Practical Alternative

IMPACT RESISTANT

IP65 SEALED

>4 Million
OPERATIONS PER KEY

RESPONSIVE KEY ACTION

ESD PROTECTED

CE COMPLIANT

- Up to 50 user programmable entry codes
- Entry code indexing for secure allocation and re-allocation of entry codes
- 4, 5 or 6 digit entry codes
- Timed release or latching operation
- Timed lock out for "code hacker" resistance
- Remote exit switch facility
- Weather resistant to IP65
- Hidden entry code feature
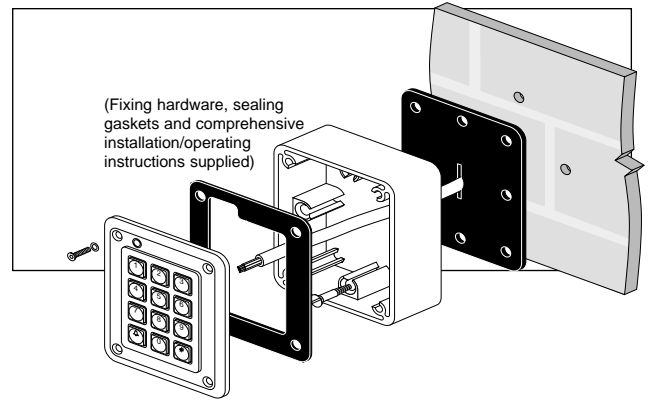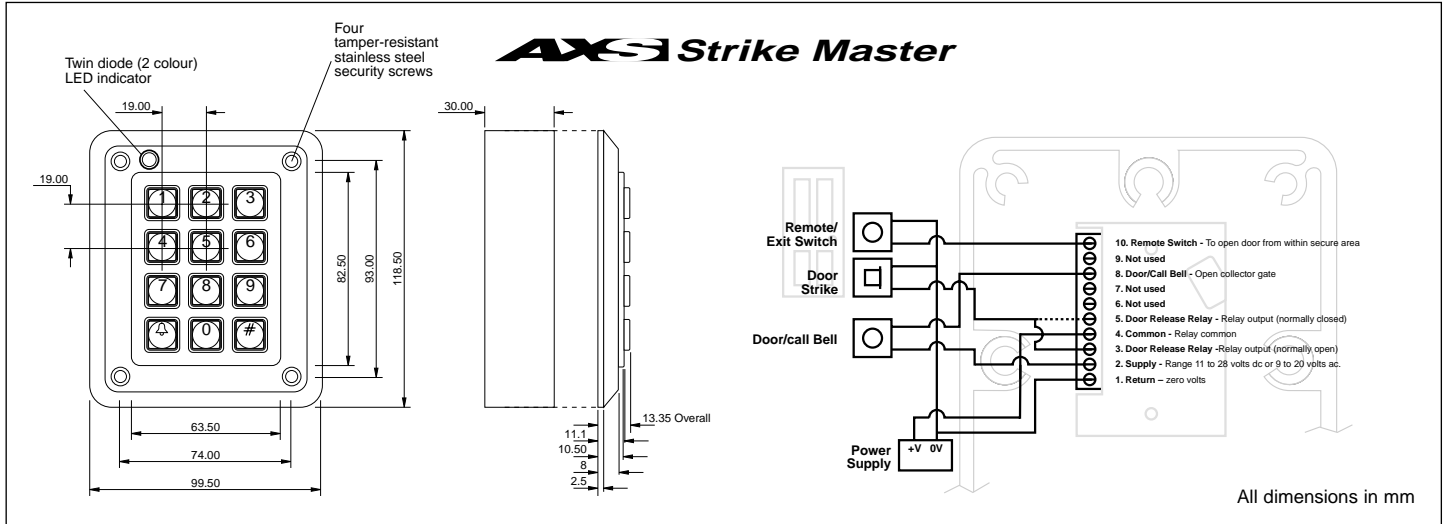- Optional Privacy Shroud

Storm®
AXS Strike Master

Storm® AXS

Secure Keypads for access control

Single Door Access-control Keypad

The STORM AXS StrikeMaster, Single Door Keypad, is ideally suited for access control in outdoor and indoor locations. It is resistant to high impact and sealed against water and dust to IP65.

(Fixing hardware, sealing gaskets and comprehensive installation/operating instructions supplied)

PRODUCT SPECIFICATIONS

AXS Strike Master

Twin diode (2 colour) LED indicator

Four tamper-resistant stainless steel security screws

Remote/Exit Switch

Door Strike

Door/call Bell

Power Supply   +V 0V

10. **Remote Switch** - To open door from within secure area
9. **Not used**
8. **Door/Call Bell** - Open collector gate
7. **Not used**
6. **Not used**
5. **Door Release Relay** - Relay output (normally closed)
4. **Common** - Relay common
3. **Door Release Relay** - Relay output (normally open)
2. **Supply** - Range 11 to 28 volts dc or 9 to 20 volts ac.
1. **Return** – zero volts

All dimensions in mm

Dimensions: 19.00, 30.00, 19.00, 82.50, 93.00, 118.50, 63.50, 74.00, 99.50, 11.1, 10.50, 8, 2.5, 13.35 Overall

- **Up to 50 user programmable entry codes**
- **Entry code indexing for secure allocation and re-allocation of entry codes**
- **4, 5 or 6 digit entry codes**
- **Timed release or latching operation**
- **Timed lock out for "code hacker" resistance**
- **Remote exit switch facility**
- **Weather resistant to IP65**
- **Hidden entry code feature**
- **Volt free, normally open/normally closed release relay**

PRODUCT FEATURES	S I N G L E D O O R
Part Number	DR2KT2
Key Life (cycles)	> 4 Million
Service Temp (Dry)	-20ºC to +70ºC
Keypad Material	Super High-impact Polymer
Keypad Colour	Black
Keytop Material	Super High-impact Polymer
Keytop Colour	Black
Keytop Legends	Laser Marked
Legend Colour	White
Contact Materials	Carbon / Gold
Weather Sealed	IP65
Resistance to Static Discharge	> 12.5 KV

All **Storm AXS Keypads** incorporate the proven **STORM** switching technology ensuring rapid, reliable and responsive data entry. Specified to survive in different service environments, ranging from exposed, unsupervised public environments, to general service / indoor installations. Keypads in the **STORM AXS** range are dimensionally and electrically interchangeable.
This allows users, entering codes at all outdoor or indoor access points, to establish and maintain familiarity with the keypad features. Applications requiring two door control or alarm and door monitoring support require the **Storm AXS StrikeMaster** DE Keypads.

DR-LIT-iss. 01 – Jan 00

BSI REGISTERED FIRM

NATIONAL ACCREDITATION OF CERTIFICATION BODIES

FM 39602

CE