


Model 73045

N Type Jack to Jack Bulkhead Adapter, Pressurized



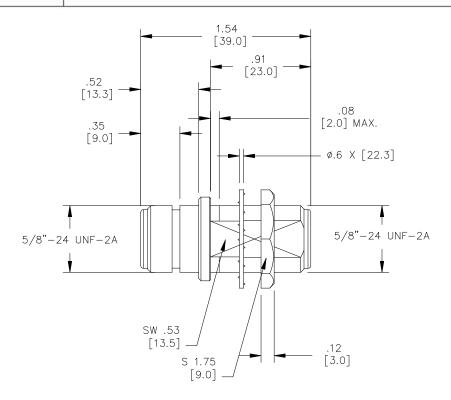

Model 73045 N Type Jack to Jack Bulkhead Adapter, Pressurized

Features

- DC 11GHz bandwidth.
- Connectors are precision machined.
- Meets interface requirements MIL-C-39012.

Materials

Center Conductor, Female: Phosphor Bronze, Gold Plated Connector Body: Brass, Nickel Plated Insulators: PTFE

Specifications

Impedance: 50Ω Frequency Range: DC - 11GHz Contact Resistance: Center Conductor: ≤1.0 mΩ Outer Conductor: ≤0.2 mΩ Insulation Reistance: ≥ 5000 MΩ Dielectric Withstand Voltage: 1500V For CE compliance, do not hold in hand when voltages exceed 33 Vrms / 70 Vdc. Number of Insertions: 500 cycles minimum

Ordering Information

Model: 73045

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

USA: Sales: 800-490-2361 Technical Support: technicalsupport@pomonatest.com Fax: 425-446-5844 Europe: 31-(0) 40 2675 150 International: 425-446-5500 Where to Buy: www.pomonaelectronics.com