

Technical Data Sheet

PMC02A platform P-series battery charger



32 Watts 2 bay desktop professional modular battery charger

Features:

- 32W maximum charging power per bay
- Consisting of a base charger and a customizable battery adapter module
- Two bay charger for Smart batteries
- Suitable for cell chemistries NiCd, NiMH, LiIon or LiPoI
- Fast design modification for battery adapter modules
- Very safe charging, monitoring of cell-voltage, cell-temperature and charge time
- Wide input voltage range for worldwide use
- With external power supply
- International approvals for safety and EMI

Applications:

- Suitable for use with notebook and other IT batteries

Specification PMC02A

Input	
Voltage	24VDC
Power	65W max.
Current range	0 - 2.5A

Output	
Voltage range	0 – 16.8VDC
Power	2 x 32W max.
Current	0 – 3.3A
Voltage tolerance ⁽¹⁾	±1% max.
Current tolerance ⁽¹⁾	±10% max.
Protection	Short circuit Over temperature shutdown

Environmental	
Cooling	convection cooled
Temperature	Operating: 5°C to 35°C Non-operating -10°C to 60°C
Pressure & altitude	Operating: 1060hPa to 795hPa -382m to 2000m Non-operating: 1060hPa to 572hPa -382m to 4570m
Humidity	5 to 95% r. H., non-condensing


General	
Battery Adapter	Customized
Efficiency ⁽²⁾	typical 80% at 100% load
MTBF	> 20000h at 25°C and full load per MIL-HDBK 217F
Green procurement	RoHS WEEE Chinese RoHS
Indicator	LED panel (See next page)

Technical Data Sheet

PMC02A platform P-series battery charger



Operation display		
LED Indicator	LED color	Charging condition
LED N°4	Off	Battery charging station is not supplied
	Solid green	Battery charging station is supplied
LED N°1	Solid Green	Charging complete
LED N°2	Solid Amber	Charging in process (rapid or trickle)
LED N°3	Solid Red	Abnormal charge mode (due to defective battery)
	Blinking Red	Standby mode (due to abnormal temperature)
LED N°1, 2, 3	Off	Battery not installed or improperly installed.

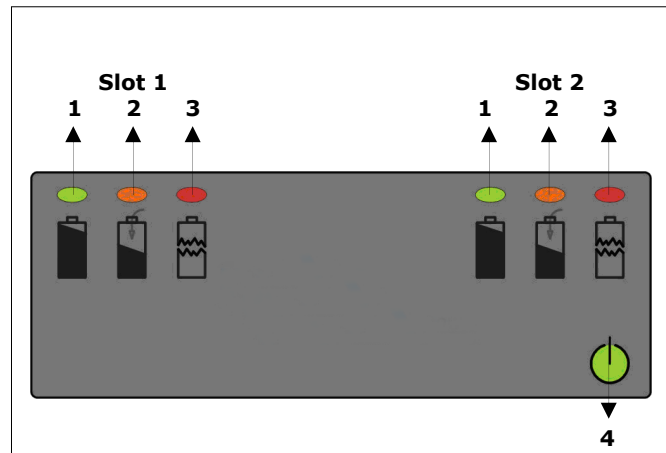

Safety & EMC		
Regulatory approvals	Europe USA, Canada International	CE cULus UL60950-1 CB Report IEC60950-1
Electromagnetic emissions	Europe USA	EN55022, level B, EN55024 FCC15 class B
Electromagnetic Immunity	ESD immunity Electromagnetic field immunity EFT / Burst Surge Conducted Immunity Magnetic Fields	EN/IEC61000-4-2, 4/8kV, performance criteria B EN/IEC61000-4-3, 3V/m, performance criteria A EN/IEC61000-4-4, 1kV, performance criteria B EN/IEC61000-4-5, 1kV, performance criteria B EN/IEC61000-4-6, 3V, performance criteria A EN/IEC61000-4-8, 3A/m, performance criteria A

Mechanical Details	
Housing dimensions (LxWxH)	155 x 225 x 95 mm
Operation display dimensions (LxWxT)	83 x 30 x 1.3mm
Weight	610 g (without module)

Notes:

1. Total regulation tolerance includes initial set accuracy, line and load regulation
2. Power losses of input and output cables are not considered here.
Ambient temperature $T_A = 20^\circ\text{C}$ unless otherwise noted.

Germany/Headquarters	France	USA	Hong Kong/China
RRC power solutions GmbH Technologiepark 1 D-66424 Homburg / Saar	RRC power solutions SAS 69, rue Louise Michel F-92300 Levallois-Perret	RRC power solutions Inc. 18340 Yorba Linda Blvd., Suite 107-437 Yorba Linda, CA 92886-4104	RRC power solutions Ltd. 9/F Park Tower, 15 Austin Road Tsim Sha Tsui, Kowloon, Hong Kong
Tel.: +49 6841 98090 Fax: +49 6841 9809280 Email: sales@rrc-ps.de Web: www.rrc-ps.de	Tel.: +33 13005 6100 Fax: +33 13005 6101 Email: france@rrc-ps.com Web: www.rrc-ps.com	Tel.: +1 714 777 3604 Fax: +1 714 777 3658 Email: usa@rrc-ps.com Web: www.rrc-ps.com	Tel.: +852 2376 0106 Fax: +852 2376 0107 Email: hkrrc@rrc-ps.cn Web: www.rrc-ps.com