

RAD7164-NMx Power MOSFET Die

Datasheet

September, 2012

www.aeroflex.com/MOSFETS

FEATURES

- ❑ 150V breakdown voltage
- ❑ 45 A current rating
- ❑ $0.24\Omega R_{DS(on)}$
- ❑ 160nC gate charge
- ❑ -55°C to $+125^{\circ}\text{C}$ temperature range
- ❑ Operational Environment radiation testing to MIL-STD-750
 - Total-dose: 100 krad(Si)
 - SEGR/SEB immune to Xe at full rated drain potential
- ❑ Bare die also available
 - Prototypes, EMs and Class S
- ❑ Drop-in compatible with industry standards
- ❑ Class S MOSFETs built to your custom flow

INTRODUCTION

Aeroflex RAD's new radiation tolerant power MOSFETs are now available in die, seven standard package options and custom packaging for HiRel environments. Applications within military, aerospace, medical, nuclear power generation, high energy physics research laboratories can benefit from the use of this new series of MOSFETs. Aeroflex's Power MOSFETs are radiation tolerant to 100 krad(Si) and SEGR/SEB immune to their full rated breakdown potential.

Operational power losses are minimized by Aeroflex's ideal combination of low $R_{DS(on)}$ and gate charge. Die size is optimized for maximum current rating while meeting industry norms. These units are suitable for standalone and hybrid applications.

The RAD7164-NMx are well suited for low loss switching applications, such as DC-to-DC Converters and solid-state relays. They are drop-in compatible with industry standards.

ELECTRICAL CHARACTERISTICS (Case temperature (T_c) = 25°C unless otherwise specified)

CHARACTERISTICS		TEST CONDITIONS		LIMITS			UNITS
				MIN	TYP	MAX	
Drain-Source Breakdown Voltage	BV_{dss}	$V_{gs} = 0V, I_d = 1mA$		150	-	-	V
Gate-Threshold Voltage	$V_{gs(th)}$	$V_{ds} = V_{gs}, I_d = 1.0mA$		2.0	-	4.0	V
Gate-Body Leakage	I_{gss}	$V_{gs} = \pm 20V$		-	-	100	nA
Zero-Gate Leakage	I_{dss1}	$V_{ds} = 120V, V_{gs} = 0V$		-	-	25	μA
Drain Current	I_{dss2}	$V_{ds} = 120V, V_{gs} = 0V, T_c = 125^{\circ}\text{C}$		-	-	250	
Drain-Source On Resistance	$R_{DS(on)}$	$V_{gs} = 12V, I_d = 36A$		-	-	0.24	ohms
Gate to Source Charge at 12V	Q_{gs}	$V_{gs} = 12V$	$I_d = 45A$ $V_{dd} = 75V$	-	-	150	nC
Diode Forward Voltage	V_{sd}	$I_d = 45A, V_{gs} = 0V$		0.6	-	1.2	V
Continuous source current (body diode)	I_s	0.6		-	-	-	A

POST-RADIATION ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	TEST CONDITIONS	LIMITS		UNITS	
		MIN	MAX		
Drain-Source Breakdown Voltage ^{3,4}	Bvdss	Vgs = 0V, Id = 1mA	150	-	V
Gate-Source Threshold Voltage ^{3,4}	Vgs(th)	Vgs = Vds, Id = 1.0mA	1.5	4.0	V
Gate-Body Leakage Forward ^{2,3,4}	Igss	Vgs = ±20, Vds = 0V	-	100	nA
Zero-Gate Voltage Drain Current ^{3,4}	Idss	Vgs = 0V, Vds = 120V	-	25	μA
Drain-Source On-Resistance ^{1,3,4}	R _{DS(on)}	Vgs = 12V, Ids = 28A	-	0.024	ohms

Notes:* for die products, the maximum current may be limited by packaging


1. Pulse test, 300us max
2. Absolute value
3. Gamma = 100 krad(Si)
4. Gamma irradiation bias at both Vgs = 10V, Vds = 0V and Vgs = 0V, Vds = 80% BVdss

SEE (SINGLE-EVENT-EFFECTS)

CHARACTERISTICS	SYMBOL	ENVIRONMENT ¹				MAX VDS BIAS (V) ²
		ION SPECIES	ENERGY (MeV)	TYPICAL LET (MEV/MG/CM2)	TYPICAL RANGE (u)	
Single Event Effects - Safe Operating Area	Kr	906	30	113	-10	150
	Xe	1232	59	99	-5	150

Notes:

1. Fluence = 1E6 ions/cm² (typical), T = 25°C
2. Does not exhibit Single Event Burnout (SEB) or Single Event Gate Rupture (SEGR).

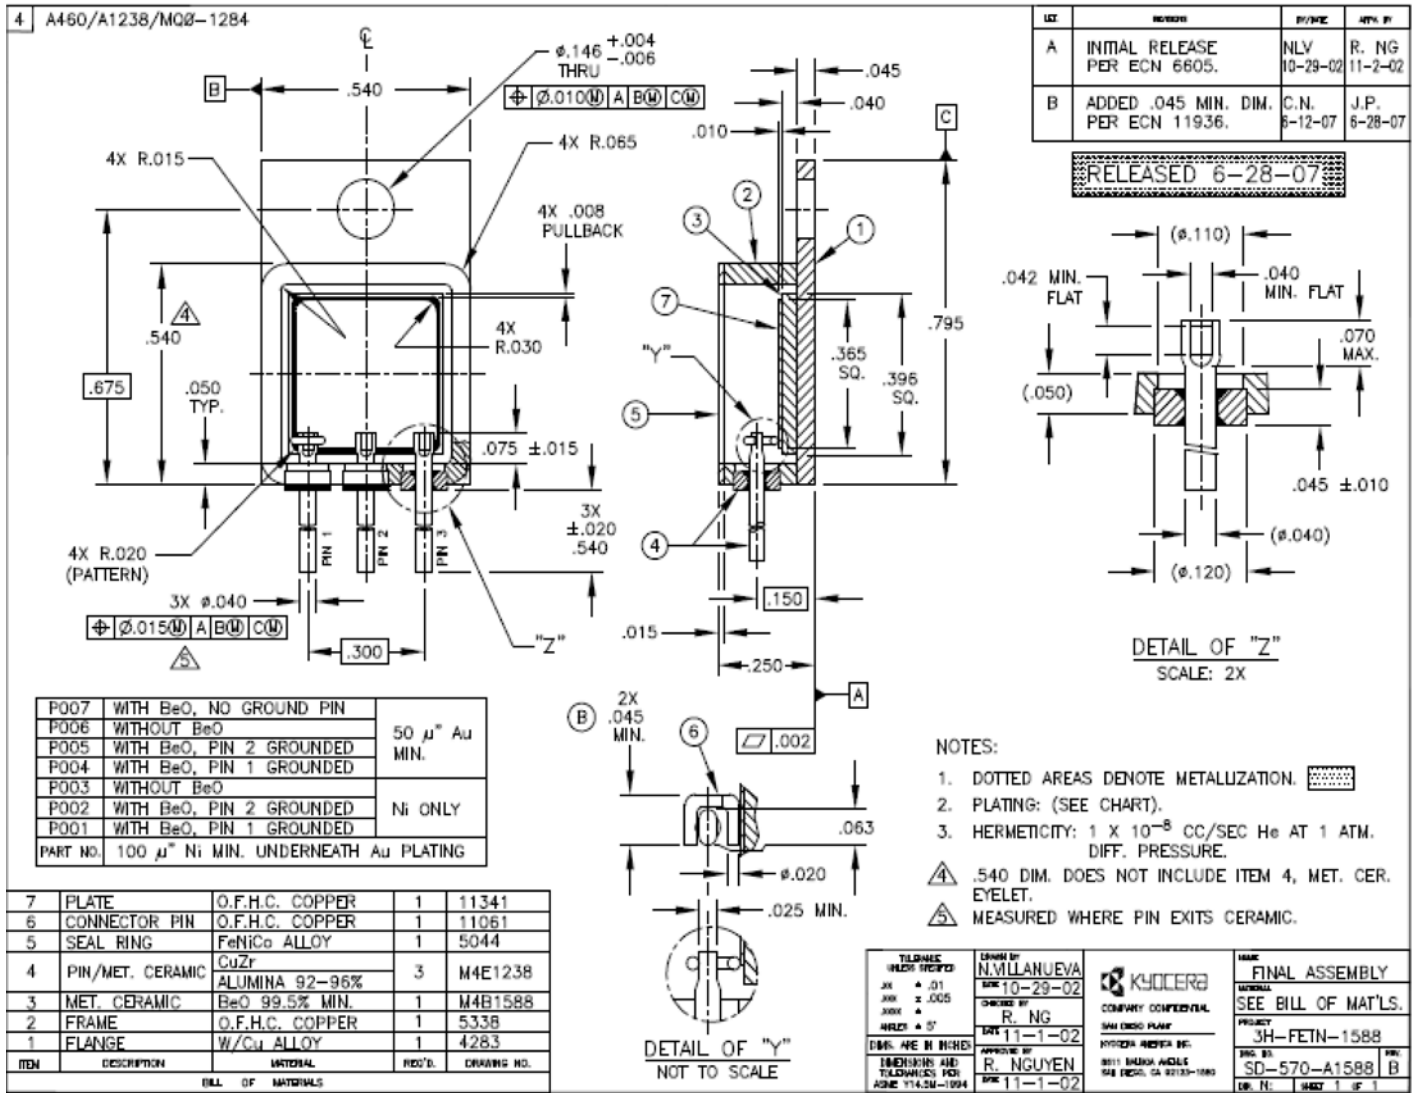

Pin Assignments: 1=Drain, 2=Source, 3= Gate

AEROFLEX RAD RAD7164-NMx PART NUMBERING:

PART #	BREAKDOWN POTENTIAL (V)	R _{DS(on)} (mΩ)	DRAIN CURRENT (A)	GATE CHARGE (nC)	TID LEVEL (krad(SI))	SEE	Die size	PKG	SCREENING
RAD7164-NMP	150	24	45	150	100	Xe	6	TO-254	Prototype
RAD7164-NME	150	24	45	150	100	Xe	6	TO-254	EM
RAD7164-NMS	150	24	45	150	100	Xe	6	TO-254	Space

Aeroflex RAD- Datasheet Definition

Advanced Datasheet - Product In Development

Preliminary Datasheet - Shipping Prototypes

Datasheet - Class S Compliant, QML or JAN

COLORADO

Toll Free: 800-645-8862
Fax: 719-594-8468

INTERNATIONAL

Tel: 805-778-9229
Fax: 805-778-1980

NORTHEAST

Tel: 603-888-3975
Fax: 603-888-4585

SE AND MID-ATLANTIC

Tel: 321-951-4164
Fax: 321-951-4254

WEST COAST

Tel: 949-362-2260
Fax: 949-362-2266

CENTRAL

Tel: 719-594-8017
Fax: 719-594-8468

www.aeroflex.com info-ams@aeroflex.com

Aeroflex RAD (Aeroflex) reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused