

# RK-615FB

## 4U Rackmount Industrial Chassis with 15-slot Backplane



### Features

- Three 5.25-inch shock-resistant drive bays
- Easy-to-remove top cover
- Adjustable hold down bar for cards
- Supports AT or ATX power supply units
- Removable air filter
- Two front accessible USB connectors

### Specifications

Dimensions	19 in x 7 in x 20.1 in (480 mm x 177 mm x 510 mm) (W x H x D)
Drive Bays	Three 5.25" front accessible drive bays Two optional racks for one 3.5" internal drive
Construction	Heavy-duty steel
Color	Standard: beige
Cooling Fans	One 12 cm ball bearing fan with 108 CFM, optional second fan
Front Panel	Front door with lock Two front accessible USB connectors LEDs: HDD active and system power System reset switch Power switch button
Backplane	14/15-slot passive backplane
Power Supply	PS2 form factor AT or ATX power supply unit
Carton Size	27.2 in x 23.6 in x 13.6 in (691 mm x 605 mm x 345 mm)
Weight	Net 19 kg (41.8 lb)

### Power Supply Options


Model Number	Watt	Input Range	Output (Max.)						
			+5V	+3.3V	+12V1	+12V2	-12V	-5V	+5Vsb
APS-935XA-EPS12	350 W	Universal	20 A	21 A	16 A	16 A	0.5 A	0.3 A	3 A
APS-946XA-EPS12	460 W	Universal	20 A	24 A	16 A	16 A	0.5 A	0.3 A	3 A

### Ordering Information

Model Number	Color	Backplane	Power Supply
NS-615FB-15S-350	Beige	HPCI-15S	APS-935XA-EPS12
NS-615FB-15S10-460	Beige	HPCI-15S10	APS-946XA-EPS12

### Dimensions

Units: mm

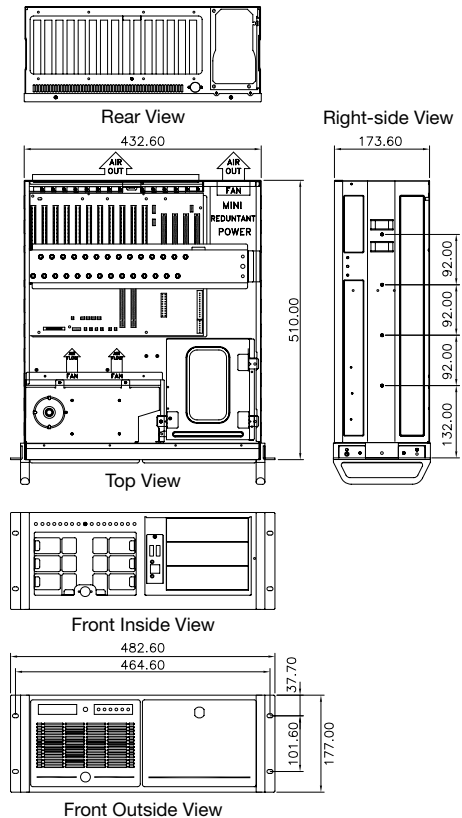

### Backplane Options

Model Name	PICMG® SBC	PCIe x1	PCIe x4	PCIe x16	PCI	ISA	PSU Connector
EBP-10E5	1	4	--	1	4	--	ATX
EBP-13E2	1	--	1	1	10	--	ATX
EBP-13E4	1	--	3	1	7	--	ATX
HPCI-15S	2	--	--	--	4	9	ATX/AT
HPCI-15S10	2	--	--	--	10	3	ATX/AT
HPCI-13S4LU	3	--	--	--	4	7	ATX/AT
HPCI-14S7U	3	--	--	--	7	5	ATX/AT
HPCI-14S12U	2	--	--	--	12	1	ATX/AT
HPCI-14S/ATX	2	--	--	--	4	8	ATX/AT

### Mechanical Layout

