



piconet® coupling module for EtherNet/IP™
4 digital pnp inputs filter 3 ms
4 digital outputs 0.5 A
SIPL-0404D-0003

- configuration interface
- Configurable functions
- Supported via I/O-ASSISTANT 2
- Direct connection to the fieldbus
- Direct connection to the IP link
- Fibre-glass reinforced housing
- Encapsulated module electronics
- Metal connector
- Degree of protection IP67


Ethernet M12 x 1





input M8 x 1



Output M8 x 1



Voltage supply M8 x 1

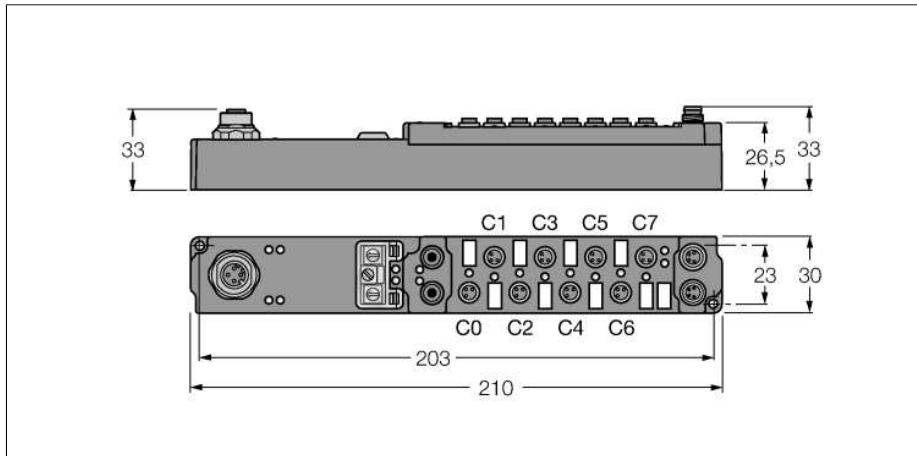

Type code	SIPL-0404D-0003
Ident no.	6824472
Operating / load voltage	20...29 VDC
Operating current	≤ 100 mA
Transmission rate Ethernet	10 Mbps / 100 Mbps
Addressing modes Ethernet:	via coded rotary switches
Service interface	parameterisation via I/O-ASSISTANT
Electrical isolation	Ethernet for operating voltage
Fibre-optic length	≤ 15 m
Number of channels	4 digital inputs acc. to EN 61131-2
Input voltage	20...29 VDC via operating voltage
Low level signal voltage	-3...5 VDC (EN 61131-2, type 2)
High level signal voltage	11...30 VDC (EN 61131-2, type 2)
Input delay	3 ms
Max. input current	6 mA
Number of channels	4 digital outputs acc. to EN 61131-2
Output voltage	20...29 VDC from load voltage
Output current per channel	0.5 A, short-circuit proof
Load type	resistive, inductive, lamp load
Switching frequency	≤ 500 Hz
Simultaneity factor	1
Dimensions (W x L x H)	30x210x26.5mm
Operating temperature	0...+55 °C
Storage temperature	-25 to 85 °C
Vibration test	as per EN 60068-2-6
Shock test	acc. to DIN EN 60068-2-27
Electro-magnetic compatibility	according to EN 61000-6-2/EN 61000-6-4
Protection class	IP67
Approvals	CE, cULus

piconet® coupling module for EtherNet/IP™
4 digital pnp inputs filter 3 ms
4 digital outputs 0.5 A
SIPL-0404D-0003

LEDs

	LINK green	ACT green	EIP R green	EIP E red	Function
Ethernet	ON				physical connection present
	OFF				no physical connection present
		flashing			bus traffic present
		OFF			no bus traffic present
EtherNet/IP			ON 0,5 s	OFF	IP address ok
			OFF	OFF	no IP address
			ON	OFF	online
			ON 0,1 s	OFF	offline PLC stop
			OFF	ON 0,5 s	time out
			OFF	ON	IP address conflict

	LED designation	Status green	Status red	Function
IP-Link / module status	RUN / ERR (I/O)	flickers/ON	OFF	Receiving error-free IP-Link protocols
		flickers	flickers	Receiving faulty IP-Link protocols
		OFF	flickers	Receiving faulty IP-Link protocols / system fault
		OFF	ON	No receipt of IP-Link protocols / module error
Inputs	0...3	OFF		Input inactive (not dampened)
		ON		Input active (dampened)
Outputs	4...7	OFF		Output inactive (not switched)
		ON		Output active (switched)
Power supply	U _B	OFF		Operating voltage U _B < 18 VDC
		ON		Operating voltage U _B ≥ 18 VDC
	U _L	OFF		Load voltage U _L < 18 VDC
		ON		Load voltage U _L ≥ 18 VDC

Data in process image

	Input	Byte 0	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
4 bit input data and output data each are mapped.	Input	Byte 0	Is used by the physically following bit-oriented extension module connected via the IP Link.				C3P4	C2P4	C1P4	C0P4	
	Output	Byte 0					C7P4	C6P4	C5P4	C4P4	

C... = Connector no., P... = Pin no.