


### Performance Data

(Typical values for batteries stored at +25 °C for one year)


System	Lithium Thionyl Chloride
Nominal voltage	3.6 V
Nominal capacity	2.2 Ah
Nominal current	2 mA
Max. continuous discharge current	60 mA
Pulse current capability	140 mA
Anode surface area	14 cm <sup>2</sup>
Lithium content	0.65 g
Weight	18 g
Volume	8 cm <sup>3</sup>
Temperature range	-55 °C ... +85 °C




### Typical Discharge Curves at +25 °C

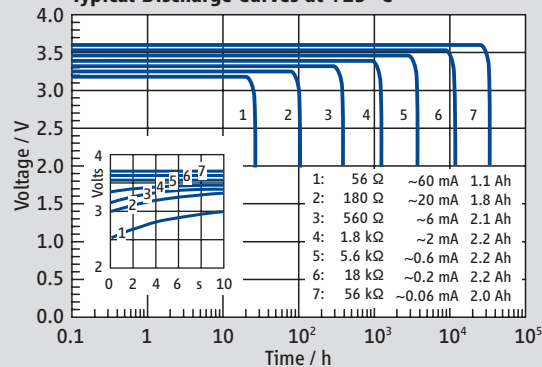


### Available Capacity

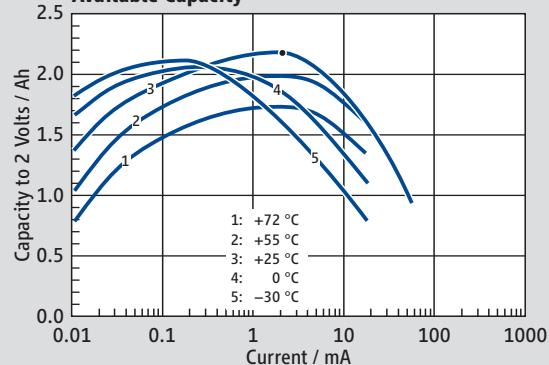


### Operating Voltage

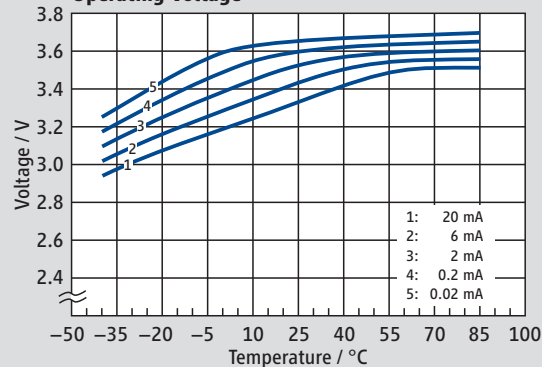


### Pulse Discharge Characteristics at +25 °C

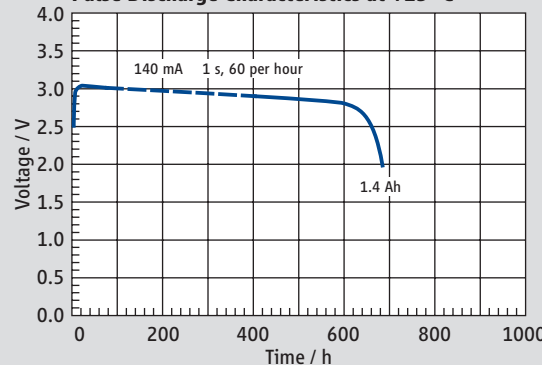


### SL-760/S

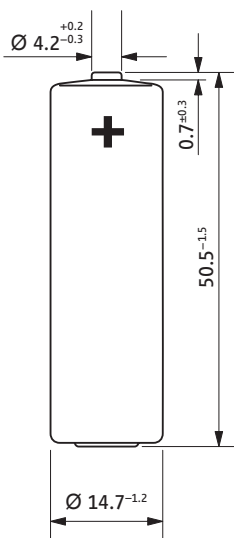


### SL-760/T




### SL-760/P

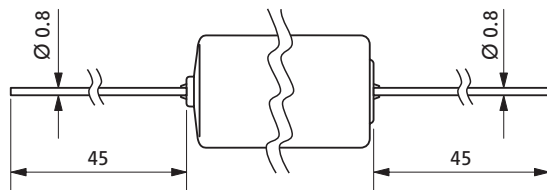

### SL-760/PR



### SL-760/PT



### Available Terminations

Termination	Standard	Catalogue No.
SL-760/S	Standard	11 1 07601 00
SL-760/T	Tags	11 1 07602 00
SL-760/P	Pins	11 1 07603 00
SL-760/PR	Pins radial	11 1 07606 00
SL-760/PT	Polarized tags	11 1 07608 00

**WARNING:**  
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.