

VRLA Rechargeable Battery

HR22-12 (HR22-12FR)



FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- The battery is designed for high rate usage.
- Absorbent Glass Mat technology for efficient gas recombination.
- The power density at 5 min~15min discharging rate is 30% higher than BP series.

APPLICATION

- UPS
- Fishing Lights
- Booster
- Emergency Lights
- Lawn Mowers
- Video Camcorders(VCR)



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	20Ah @ 10 hour rate F.V.(1.75V/cell)
Approx. Weight	6500g(14.33lbs.)
Terminals	B1 (Fitting M5 bolt & nut) , T2 and I1 are optional
Internal Resistance	≤9mΩ (Fully Charged)
Max. Discharge Current	300 A (5 sec.)
Max. Charge Current	6.0 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)

ISO 9001	ngs ISO 9001 REGISTERED	UKAS REGISTERED
ISO14001	WSC ISO14001	
UL	UL MH19884	
CE	CE C4M20310-2474-E-16	
<ul style="list-style-type: none"> • IEC 61056-1 • JIS C 8702-1 • GB/T 19639.1 		

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

Length

181±1.5 (7.13±0.06)

Width





76±1.5 (2.99±0.06)

Container Height

166±1.5 (6.54±0.06)

Total Height

166±1.5 (6.54±0.06)

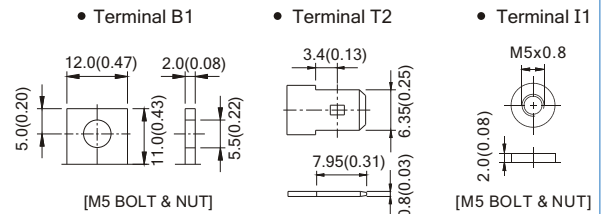

Terminal Hardware Initial Torque: B1(2.5Nm±5%),I1(4.0Nm±5%)

Constant power discharge characteristics at 25 °C/77 °F

Unit: W

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	902.0	616.0	446.1	380.6	289.3	220.0	183.7	161.7	89.2
1.70V	1078.0	687.5	485.1	403.2	301.4	228.3	189.8	165.6	90.9
1.60V	1155.0	723.3	507.1	418.0	308.0	233.8	193.6	168.3	92.4
1.50V	1188.0	737.0	518.1	424.6	311.9	236.5	195.8	170.0	92.9
1.40V	1210.0	746.9	524.2	428.5	314.1	238.2	197.5	171.1	93.1
1.30V	1221.0	753.5	528.0	431.2	315.7	239.3	198.6	171.6	93.4

Constant current discharge characteristics at 25 °C/77 °F

Unit: A

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	80.54	54.04	38.59	32.64	24.52	18.50	15.37	13.48	7.43
1.70V	98.00	60.31	41.96	34.58	25.54	19.20	15.88	13.80	7.58
1.60V	105.00	63.45	43.87	35.85	26.10	19.66	16.20	14.03	7.70
1.50V	108.00	64.65	44.82	36.42	26.43	19.89	16.38	14.17	7.74
1.40V	110.00	65.52	45.35	36.75	26.62	20.03	16.53	14.26	7.76
1.30V	111.00	66.10	45.67	36.98	26.75	20.13	16.62	14.30	7.78

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained herein.