





DEPT	
1	1
2	
3	
4	2
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME:

TERMINAL, FEMALE

PART NO:

3000H60A/

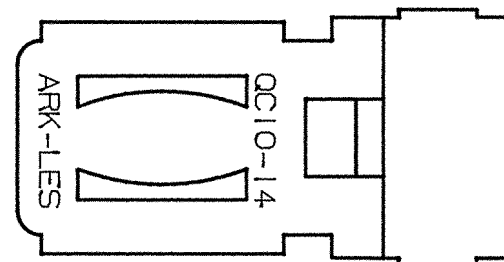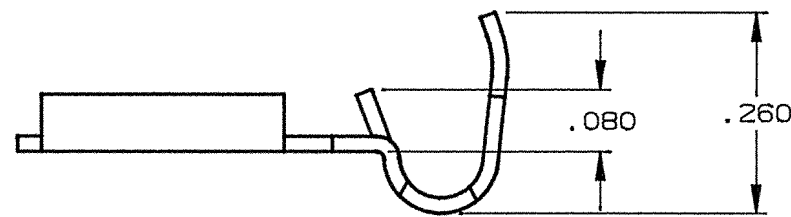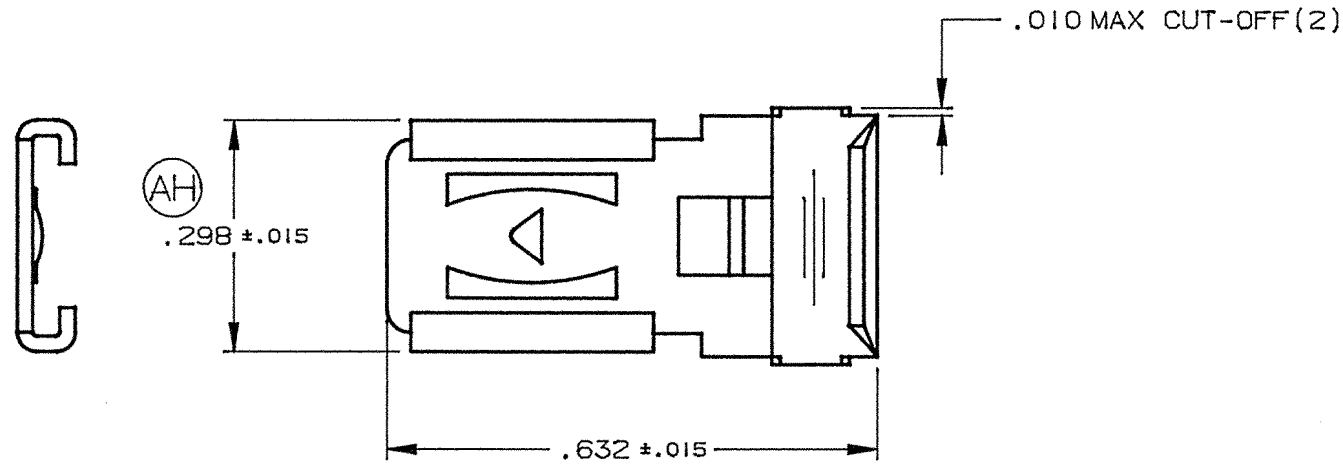


PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3000H60A	.020±.001 THK BRASS	PRETINNED	YES
3000H60AB		NONE	YES
3000H60AC		SILVER PLATE	YES

NOTES:

- TO MATE WITH .250 X .032 MALE TAB.
- TO ACCOMMODATE #10-#14 GAUGE WIRE.
- RECOMMENDED STRIP LENGTH: 5/16 ±1/32.
- FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER. (I.E. 3000H60AR)
- FOR TERMINAL LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER. (I.E. 3000H60A-1)
- INSERTION/WITHDRAWAL FORCES TO COMPLY WITH UL 310 WHEN USING TEST TAB CS3000M-10.


(AH)

ARK-LES
UNCONTROLLED




FABRICATED TERMINAL STRIP

SCALE 1:1

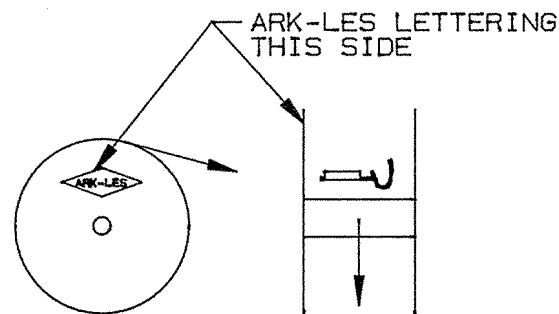

STANDARD REELING
(I.E. 3000H60A)

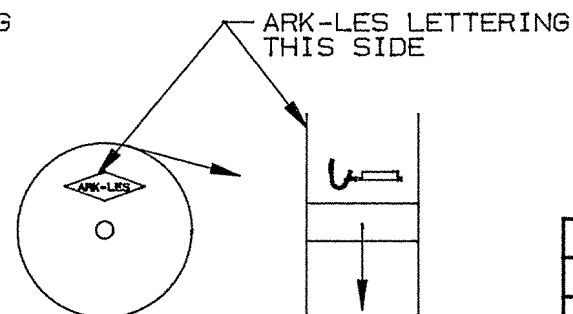

REVERSE REELING
(I.E. 3000H60AR)

REV.	DESCRIPTION	DATE	DR.	SCALE: 4=1	CAD NO: BT00068	TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
				PROD. REL. 4155 5/12/65 BA		MATERIAL: SEE TABLE
				QUOTE REL. 92497 2/22/65 BA		FINISH: SEE TABLE
				DR: B J CARUTHERS 6/30/95		PART NO: 3000H60A/
				CHK'D: R.W.T. 4-21-99		
AJ	REVISED PER ECR #11749	4/19/99	RT	APP: COR 4-26-99		
AH	REVISED & REDRAWN PER ECR #10514	6/28/95	BJC	SUPERCEDES DWG. DATED: 5/28/93		