
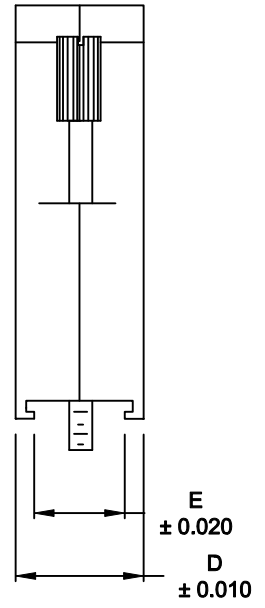


DESCRIPTION: 970 SERIES D-SUB BACKSHELL


**BACKSHELL KIT INCLUDES:**

- (2) BACKSHELL HALVES
- (2) 4-40 THUMBSCREWS
- (2) HOUSING SCREWS
- (1) SET OF COMPRESSION INSERTS - VARIOUS SIZES  
Ø0.157 [4.0], Ø0.197 [5.0], Ø0.276 [7.0], Ø0.394 [10.0]
- (1) COMPRESSION SPRING


MATERIAL: DIE-CAST ZINC ALLOY  
 PLATING: NICKEL OVER COPPER  
 JACKSCREWS: STEEL  
 M3 HOODSCREWS: STEEL  
 COMPRESSION INSERT: ABS UL 94-HB  
 OPERATING TEMP: -30°C TO +90°C

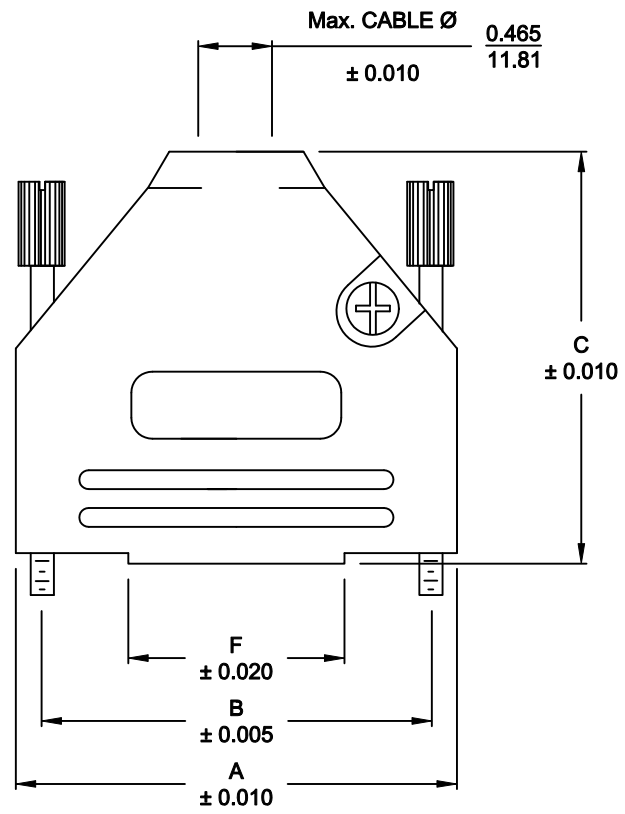

DIMENSIONS (IN.)						
No. OF PINS	A	B	C	D	E	F
9	1.228	0.984	1.571	0.590	0.388	0.514
	31.19	24.99	39.90	14.99	9.86	13.06
15	1.555	1.312	1.634	0.590	0.393	0.789
	39.50	33.32	41.50	14.99	9.98	20.04
25	2.102	1.852	1.913	0.590	0.378	1.024
	53.39	47.04	48.59	14.99	9.60	26.01
37	2.744	2.500	2.110	0.590	0.409	1.690
	69.70	63.50	53.59	14.99	10.39	42.93

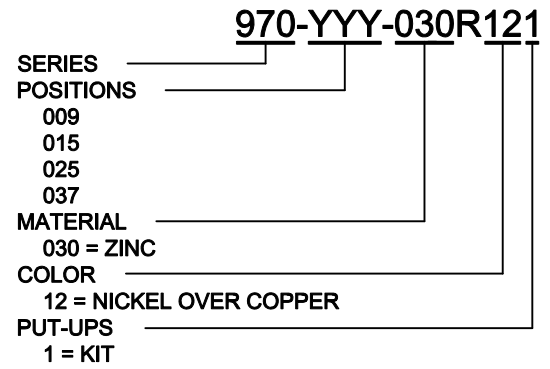

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: <b>PAM JENKINS</b>	DATE: <b>6-10-05</b>	
	<h1>NorComp</h1>			CHECKED:	DATE:
SCALE				SHEET 1 OF 1	REV 11
DWG NO. <b>970 -YYY-030R121</b>					