



REV. Status  
 REVISION -  
 10/25/01 RJ  
 REVISION A  
 REVISED PLUG  
 LOCATION. ADDED  
 RoHS  
 05/22/06 MP

- A. Electrical specifications
1. Input voltage: AC 120V ±10% 60Hz ±0.5Hz
  2. Output voltage and current: DC 18V at 200mA

$V_{in}$	100% Load	No Load
108	15.0VDC MIN	-
120	17.5-18.5VDC	26.0VDC MAX
132	-	29.0VDC MAX

NOTE: Specification applies after 10 minutes warm-up with full load and at any operating temperature.

3. Operating temperature: -10 °C to +40 °C
4. Storage temperature: -20 °C to +85 °C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: 1000Vrms 1 minute @ input to output


B. Typical performance data test Condition:  
 Ta= +25°C measured after 10 minute warm-up with input at 120V 60Hz

C. Safety agencies  
 UL and cUL File No. E218172


D. Nameplate: Information is as follows:  
 Metallic letters on a black background



TYPICAL PERFORMANCE CHART

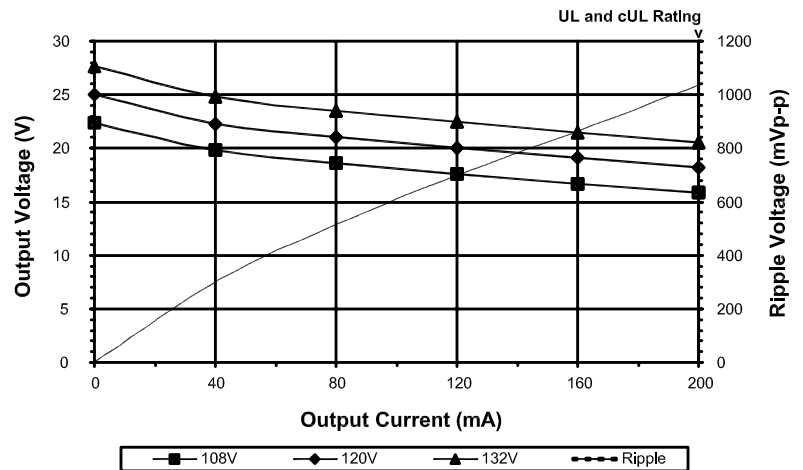

E. Mechanical Specifications  
 All dimensions shown are nominal unless otherwise specified

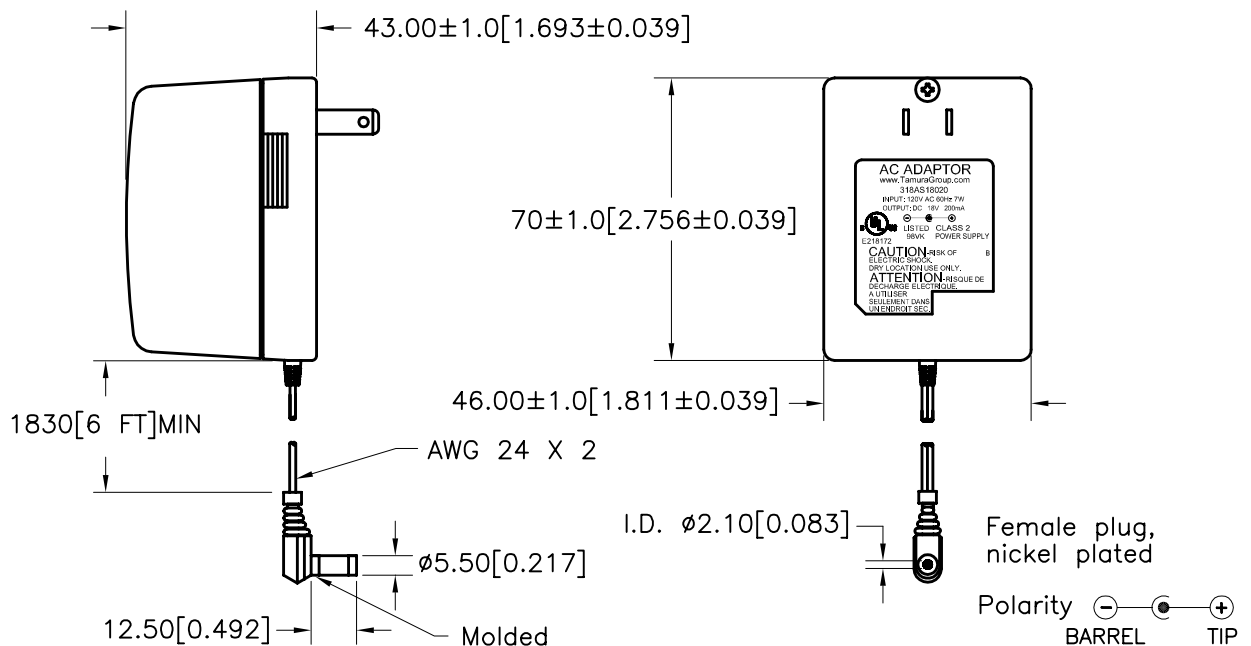

PREPARED BY:  
 K. BRENNAN  
 ENGINEER:  
 M. PITCHAI  
 QUALITY CONTROL:  
 T. CLEM  
 APPROVED:  
 Y. SEKIGUCHI

DWG CONTROL NO. P-A7-12935 ACAD\PS\A7129351.DWG	REV A	UL/cUL DC 18V 200mA POWER SUPPLY	318AS18020 MODEL SPECIFICATION
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE		TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (951) 699-1270 FAX 9516769482	

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.