


MOS FET Relays G3VM-81GR

New MOS FET Relay Designed for Switching Minute and Analog Signals, SOP Package.

- New model for 80-V loads.
- Turn-ON/turn-OFF times of 0.07 ms (typical).
- Capacity between output terminals of 2.5 pF (typical).
- RoHS compliant

Application Examples

- Broadband systems
- Measurement devices and Data loggers
- Amusement machines

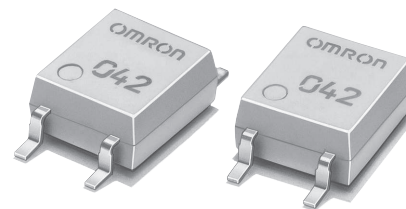

Note: The actual product is marked differently from the image shown here.

List of Models

| Contact form | Terminals | Load voltage (peak value) | Model | Number per stick | Number per tape |
|--------------|----------------------------|---------------------------|---------------|------------------|-----------------|
| SPST-NO | Surface-mounting terminals | 80 VAC | G3VM-81GR | 100 | --- |
| | | | G3VM-81GR(TR) | --- | 2,500 |


Dimensions

Note: All units are in millimeters unless otherwise indicated.

G3VM-81GR




Note: The actual product is marked differently from the image shown here.

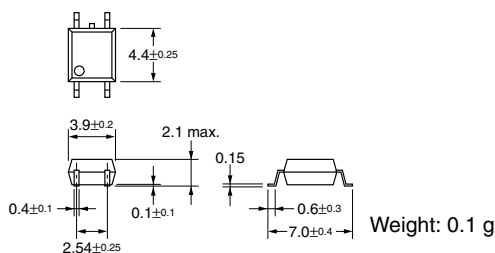


Terminal Arrangement/Internal Connections (Top View)

G3VM-81GR



Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-81GR



■ Absolute Maximum Ratings (Ta = 25°C)


| Item | | Symbol | Rating | Unit | Measurement Conditions |
|--|-------------------------------------|-----------------------------|-------------|-----------|-------------------------------|
| Input | LED forward current | I_F | 50 | mA | |
| | Repetitive peak LED forward current | I_{FP} | 1 | A | |
| | LED forward current reduction rate | $\Delta I_F/^\circ\text{C}$ | -0.5 | mA/°C | $T_a \geq 25^\circ\text{C}$ |
| | LED reverse voltage | V_R | 5 | V | |
| | Connection temperature | T_j | 125 | °C | |
| Output | Load voltage (AC peak/DC) | V_{OFF} | 80 | V | |
| | Continuous load current | I_O | 40 | mA | |
| | ON current reduction rate | $\Delta I_O/^\circ\text{C}$ | -0.4 | mA/°C | $T_a \geq 25^\circ\text{C}$ |
| | Connection temperature | T_j | 125 | °C | |
| Dielectric strength between input and output (See note 1.) | | V_{I-O} | 1,500 | V_{rms} | AC for 1 min |
| Ambient operating temperature | | T_a | -20 to +85 | °C | With no icing or condensation |
| Storage temperature | | T_{stg} | -40 to +125 | °C | With no icing or condensation |
| Soldering temperature | | --- | 260 | °C | 10 s |

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■ Electrical Characteristics (Ta = 25°C)

| Item | | Symbol | Minimum | Typical | Maximum | Unit | Measurement conditions |
|---|--|------------|---------|---------|---------|------------------|---|
| Input | LED forward voltage | V_F | 1.0 | 1.15 | 1.3 | V | $I_F = 10 \text{ mA}$ |
| | Reverse current | I_R | --- | --- | 10 | μA | $V_R = 5 \text{ V}$ |
| | Capacity between terminals | C_T | --- | 15 | --- | pF | $V = 0, f = 1 \text{ MHz}$ |
| | Trigger LED forward current | I_{FT} | --- | --- | 3 | mA | $I_O = 40 \text{ mA}$ |
| Output | Maximum resistance with output ON | R_{ON} | --- | 16 | 25 | Ω | $I_F = 5 \text{ mA}, I_O = 40 \text{ mA}$ |
| | Current leakage when the relay is open | I_{LEAK} | --- | 0.5 | 1 | nA | $V_{OFF} = 80 \text{ V}, T_a = 60^\circ\text{C}$ |
| | Capacity between terminals | C_{OFF} | --- | 2.5 | 3.5 | pF | $V = 0, f = 100 \text{ MHz}, t < 10 \text{ s}$ |
| Capacity between I/O terminals | | C_{I-O} | --- | 0.7 | --- | pF | $f = 1 \text{ MHz}, V_s = 0 \text{ V}$ |
| Insulation resistance between I/O terminals | | R_{I-O} | 1,000 | --- | --- | $\text{M}\Omega$ | $V_{I-O} = 500 \text{ VDC}, R_{oH} \leq 60\%$ |
| Turn-ON time | | t_{ON} | --- | 0.07 | 0.5 | ms | $I_F = 5 \text{ mA}, R_L = 200 \Omega, V_{DD} = 10 \text{ V}$ (See note 2.) |
| Turn-OFF time | | t_{OFF} | --- | 0.07 | 0.5 | ms | |

Note: 2. Turn-ON and Turn-OFF Times




■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


| Item | Symbol | Minimum | Typical | Maximum | Unit |
|--------------------------------------|----------|---------|---------|---------|------|
| Load voltage (AC peak/DC) | V_{DD} | --- | --- | 64 | V |
| Operating LED forward current | I_F | 5 | --- | 30 | mA |
| Continuous load current (AC peak/DC) | I_O | --- | --- | 40 | mA |
| Operating temperature | T_a | 25 | --- | 60 | °C |

■ Engineering Data


LED forward current vs. Ambient temperature
IF - Ta

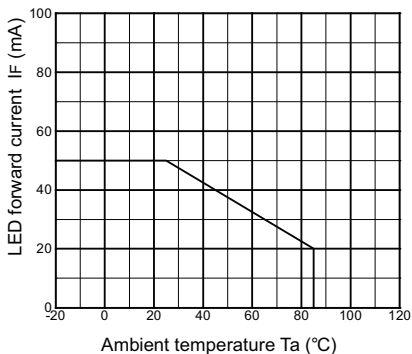


Continuous load current vs. Ambient temperature
Io - Ta

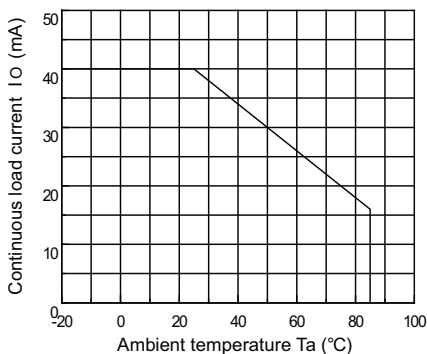


LED forward current vs. LED forward voltage
IF - VF

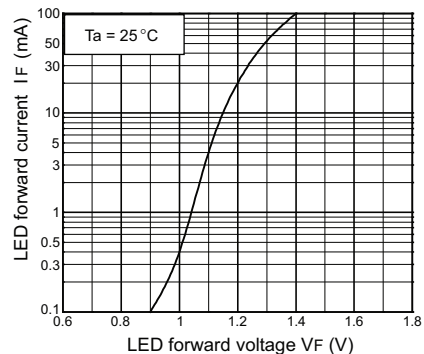


Continuous load current vs. On-state voltage
Io - VON

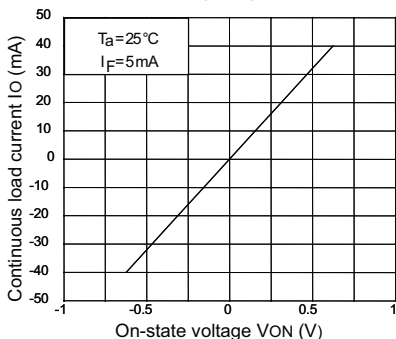


On-state resistance vs. Ambient temperature
RON - Ta

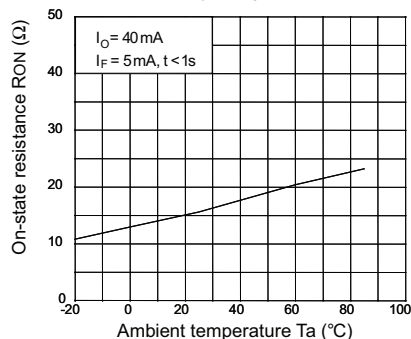


Trigger LED forward current vs. Ambient temperature
IFT - Ta

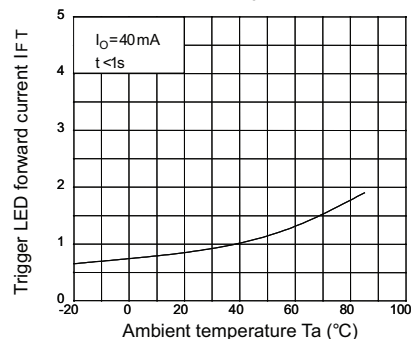


Turn ON, Turn OFF time vs. LED forward current
tON, tOFF - IF

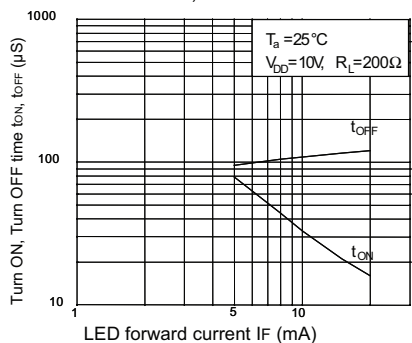


Turn ON, Turn OFF time vs. Ambient temperature
tON, tOFF - Ta

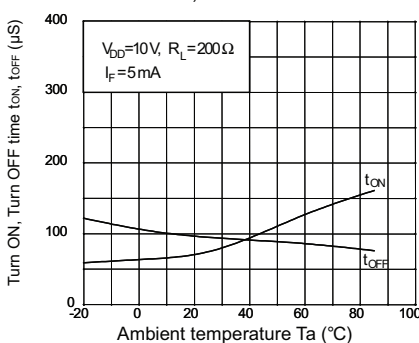

Current leakage vs. Load voltage
ILEAK - VOFF

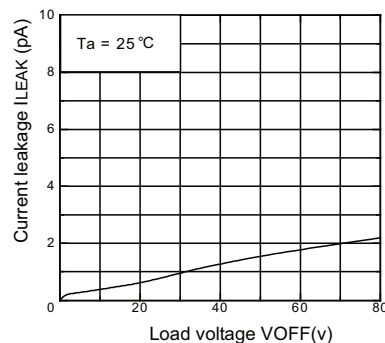

Output terminal capacitance COFF/COFF(OV) vs. Load voltage
COFF - VOFF

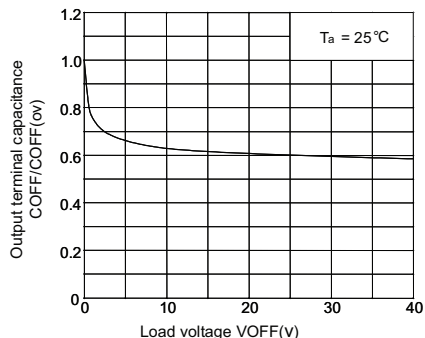

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON[®]

**OMRON ELECTRONIC
COMPONENTS LLC**

55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>