




SERIES 565

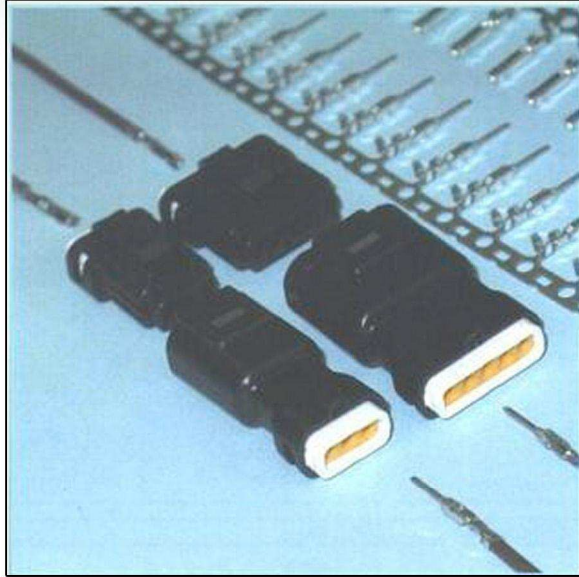

Example Part Number **565 - 003 - 000 - 3 1 0**

Series _____
 Total Number of Contacts _____
 Contact Code _____
 Style _____
 Wire Diameter _____
 Termination _____

Series 565

Total Number of Contacts 002, 003, 005

Contact Code
000 No Contacts Assembled

Style
 3 Plug (Housing Black)
 4 Receptacle (Housing Black)
 9 Special (Consult Factory)

Wire Diameter
 1 AWG 22 to 28 (Seal Colour - Yellow)
 Insulator Dia. 0.39" (1.0 mm) to .051" (1.30 mm)

Termination
0 Wire Crimp terminals required

Ordering Code Notes

- 1) Crimp contacts are available for 565 series connectors
 Contacts may be ordered separately for pre-wired or select position assembly

Part Number	Description
565-290-711	Male Contact - AWG 22 to 28
565-290-721	Female Contact - AWG 22 to 28

- 2) For contact installation, removal and crimping tool, consult factory

- 3) Insulator design prevents improper mating of individual plug and receptacle

PCB Header
565-002-420-101
565-003-420-101
565-005-420-101

FEATURES

- Fully Waterproof connector
- Plastic latch provides locking mechanism
- Plug and Receptacle in 2, 3 and 5 Contact positions
- Tools available for Contact Installation, Removal and Crimping
- Able to carry current up to 3A

SPECIFICATIONS

- Insulator Material: PBT (UL 94V-0)
- Contact Material: PB/ Tin plating
- Wire Housing Seal: Silicone Rubber
- Current Rating: 3 Amperies maximum
- Contact Resistance: 10 m Ω maximum
- Insulator Withstanding Voltage: 100VAC rms at Sea Level
- Insulation Resistance: 1000 M Ω minimum at 500 VDC
- Operating Temperature: -40 to +105 Degrees C
- Waterproof Grade 4
- Insulation Diameter from .039" (1.0 mm) to .067" (1.7mm) can be accommodated using different wire seals and contacts