


EC3C

S E R I E S

15 WATT DC-DC CONVERTERS

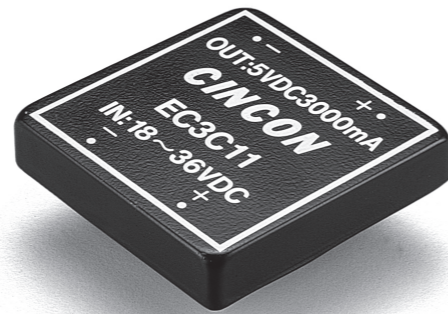

Features

- 15W Isolated Output
- Efficiency to 82%
- 2" x 2" Six-Sided Shield Metal Case
- Fixed 200KHz Switching Frequency
- Regulated Outputs
- Alternative Pin Configuration

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF.	SIZE
				NO LOAD	FULL LOAD		
EC3C01	9-18 VDC	5 VDC	3000 mA	30 mA	1660 mA	75	2" x 2"
EC3C02		12 VDC	1250 mA	30 mA	1625 mA	78	
EC3C03		15 VDC	1000 mA	30 mA	1625 mA	78	
EC3C04		±12 VDC	±625 mA	35 mA	1620 mA	77	
EC3C05		±15 VDC	±500 mA	35 mA	1620 mA	77	
EC3C06		±5 VDC	±1500 mA	35 mA	1620 mA	77	
EC3C07		3.3 VDC	3000 mA	30 mA	1178 mA	70	
EC3C11	18-36 VDC	5 VDC	3000 mA	15 mA	812 mA	78	2" x 2"
EC3C12		12 VDC	1250 mA	20 mA	772 mA	81	
EC3C13		15 VDC	1000 mA	20 mA	772 mA	81	
EC3C14		±12 VDC	±625 mA	25 mA	780 mA	80	
EC3C15		±15 VDC	±500 mA	25 mA	780 mA	80	
EC3C16		±5 VDC	±1500 mA	25 mA	780 mA	80	
EC3C17		3.3 VDC	3000 mA	15 mA	557 mA	74	
EC3C21	36-72 VDC	5 VDC	3000 mA	10 mA	390 mA	80	2" x 2"
EC3C22		12 VDC	1250 mA	15 mA	381 mA	82	
EC3C23		15 VDC	1000 mA	15 mA	381 mA	82	
EC3C24		±12 VDC	±625 mA	20 mA	386 mA	81	
EC3C25		±15 VDC	±500 mA	20 mA	386 mA	81	
EC3C26		±5 VDC	±1500 mA	20 mA	386 mA	81	
EC3C27		3.3 VDC	3000 mA	20 mA	271 mA	76	

NOTE: 1. Nominal Input Voltage 12, 24 or 48 VDC
2. Alternative pin-out version. To order, suffix a "S" to the standard model number.

Specifications

INPUT SPECIFICATIONS:

Input Voltage Range.....	12V.....	9-18V
	24V.....	18-36V
	48V.....	36-72V
Input Filter.....	Pi Type	


OUTPUT SPECIFICATIONS:

Voltage Accuracy	
Single Output.....	±1.0% max.
Dual + Output.....	±1.0% max.
Dual - Output.....	±3.0% max.
Voltage Balance Dual Output at Full Load.....	±1.0% max.
Transient Response	
Single 25% Step Load Change.....	<500µ sec.
Dual FL-1/2L ±1% Error Band.....	<500µ sec.
Ripple & Noise 20MHz BW.....	10mV RMS. max. 75mV p-p max.
Temperature Coefficient.....	±0.02%/°C
Short Circuit Protection.....	Indefinite & Current Limit
Line Regulation ¹ Single/Dual Output.....	±0.2% max.
Load Regulation ² Single/Dual Output.....	±1.0% max.

GENERAL SPECIFICATIONS:

Efficiency.....	See Table
Isolation Voltage.....	500 VDC min.
Isolation Resistance.....	10 ⁹ ohms
Switching Frequency.....	200KHz, typ.
Operating Ambient Temperature Range	-25°C to +71°C
De-rating, Above 71°C	Linearly to Zero power at 100°C
Case Temperature ³	100°C max
Cooling	Natural Convection
Storage Temperature Range.....	-40°C to + 100°C
EMI/RFI.....	Six-Sided Continuous Shield
Dimensions.....	2.00 x 2.00 x 0.40 inches (50.8 x 50.8 x 10.2mm)
Case Material.....	Black Coated Copper With Non-Conductive Base
Weight.....	57g

EC3C Series Derating Curve

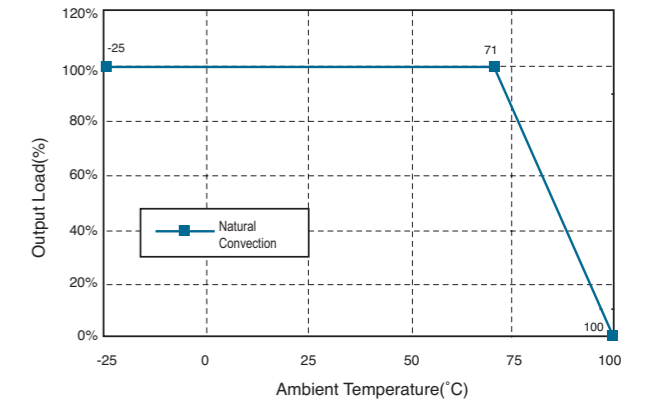


NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to 1/4 Full Load
3. Determine the Correct Fuse Size by Calculating the Maximum DC Current Drain at Low Line Input, Maximum Load and Then Adding 20 to 25% to Get Desired Fuse Size.
4. Alternative Pin Configuration Suffix "S"
5. Maximum case temperature under any operating condition should not exceed 100°C.


CASE C

All Dimensions In Inches(mm)
Tolerance Inches: .xx= ±0.04, .xxx= ±0.10
Millimeters: .x= ±1.0, .xx= ±0.25

STANDARD PIN CONFIGURATION

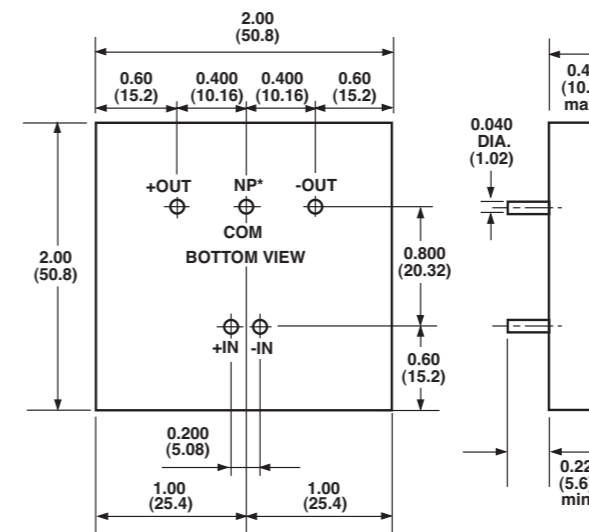

ALTERNATE PIN CONFIGURATION SUFFIX "S"

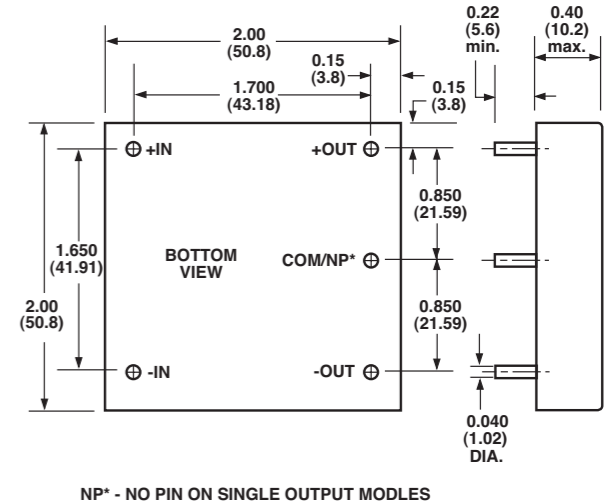

NP* - NO PIN ON SINGLE OUTPUT MODELS

All Specifications Typical At Nominal Line, Full Load and 25°C Unless Otherwise Noted.