

Low Pass Filter

VLF-160+

50Ω *DC to 160 MHz



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	8W at 25°C
DC Current Input to Output	0.5A max. at 25°C

*Passband rating, derate linearly to 3 W at 100 °C ambient
Permanent damage may occur if any of these limits are exceeded.

Features

- Rugged uni-body construction, small size
- 7 sections
- Excellent power handling, 8W
- Temperature stable
- Low cost
- Protected by US patent 6,943,646

CASE STYLE: FF704

Connectors	Model	Price	Qty.
SMA	VLF-160+	\$ 21.95 ea.	(1-9)

Applications

- Harmonic rejection
- Transmitters/receivers
- Lab use

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Low Pass Filter Electrical Specifications (T_{AMB} = 25°C)

PASSBAND (MHz)	f _{co} , MHz Nom.	STOP BAND (MHz)			VSWR (:1)		NO. OF SECTIONS
		(loss, dB)			Stopband	Passband	
(loss < 1 dB) Max.	(loss 3 dB) Typ.	F 20 Min.	35 Typ.	FR 20 Typ.	Typ.	Typ.	7
*DC - 160	230	330	480 - 2700	6100	17	1.2	

* Not for use with DC voltage at input and output ports



Outline Drawing

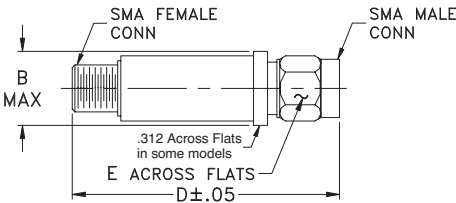

Outline Dimensions (inch mm)



B	D	E	wt.
.410	1.43	.312	grams
10.41	36.32	7.92	10

Typical frequency response



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
40	0.32	1.07
100	0.52	1.08
150	0.78	1.11
160	0.85	1.13
210	1.64	1.44
230	2.55	1.77
260	6.08	2.81
280	10.97	3.87
310	22.74	5.27
330	33.27	5.81
350	42.12	6.19
480	40.13	11.85
1000	64.46	69.49
2700	34.45	75.53
6100	20.50	36.97
9000	23.14	15.13
12000	16.88	4.24

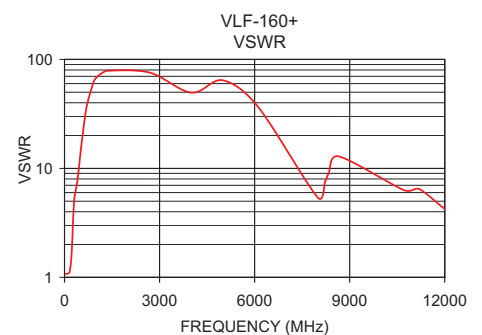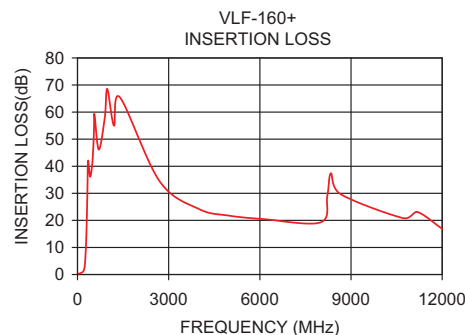

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.