


**Model 73046**  
**N Type Jack to TNC Plug Adapter**

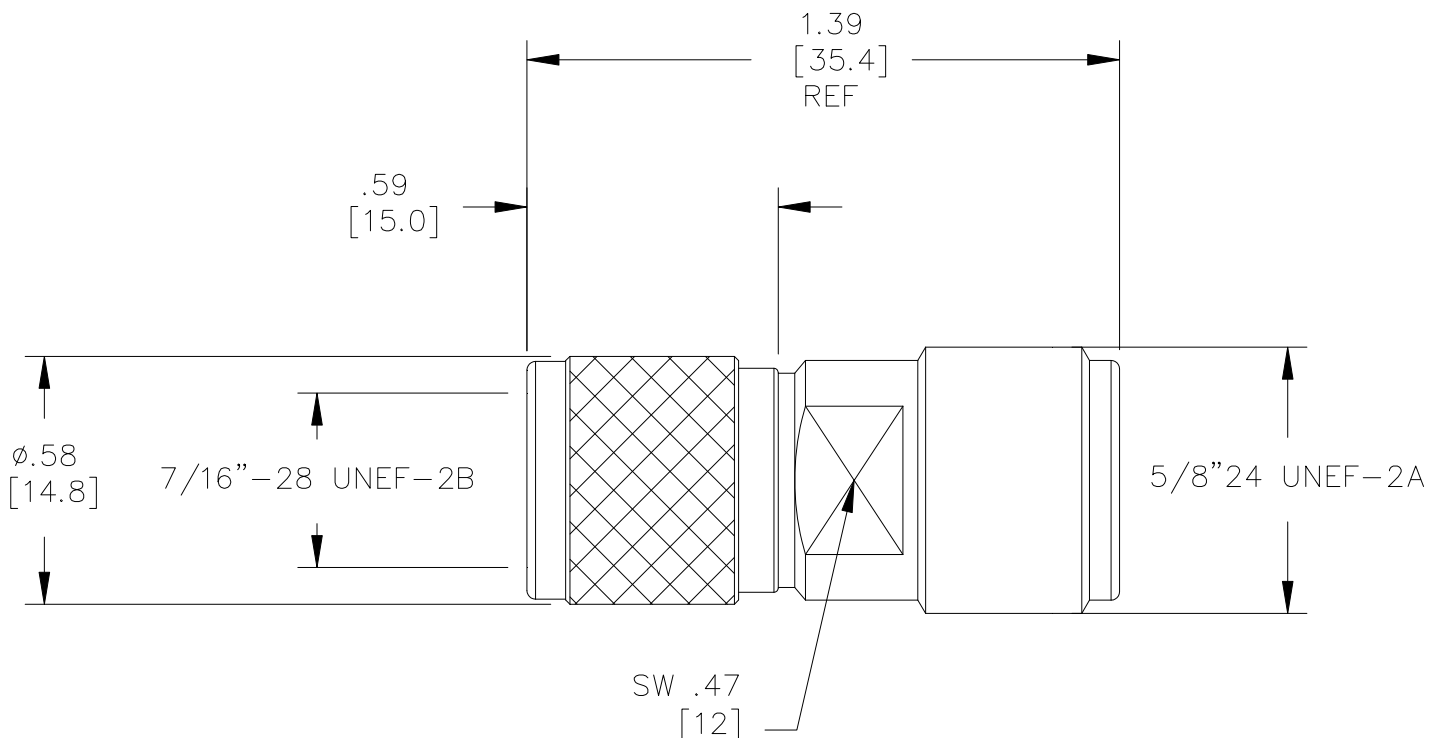

*Model 73046*  
*N Type Jack to TNC Plug Adapter*

**Materials**

Center Conductor: Phosphor Bronze, Gold Plated  
Connector Body: Brass, Nickel Plated  
Insulators: PTFE

**Specifications**

Impedance: 50Ω  
Frequency Range: DC – 11GHz  
Contact Resistance:  
    Center Conductor: ≤2.0 mΩ  
    Outer Conductor: ≤0.2 mΩ  
Insulation Resistance: ≥ 5000 MΩ  
Dielectric Withstand Voltage: 1500V  
    For CE compliance, do not hold in hand when  
    voltages exceed 33 Vrms / 70 Vdc.  
Number of Insertions: 500 cycles minimum

**Ordering Information**

Model: **73046**

**Features**

- DC – 11GHz bandwidth.
- Connectors are precision machined.

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.