


Models 7156, 7157
1/4" Jacks W/Insulated Washer & Solder Lugs



Model 7156 1/4" Phone Jack, Insulated Washers -Mono

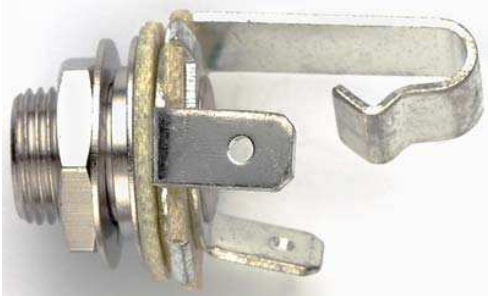

Model 7157 1/4" Phone Jack, Insulated Washers-Stereo

Use to connect with standard commercial phone plugs.

Features

- Stereo and mono versions
- Panel mountable
- Low contact resistance

Materials

- Body is diecast zinc alloy with tarnish resistant nickel plating.
- Mounting bushing is nickel-plated copper alloy.
- Insulation: Rigid plastic.
- Springs: Copper alloy.
- Sleeve terminal: Copper alloy.
- Hardware includes one copper alloy nickel-plated hex nut, and one steel nickel-plated washer.

Specifications

Number of conductors	2 (7146), 3 (7157)
Contact resistance	$\leq 0.05 \Omega$
Dielectric strength	500 V dc
Insulation resistance	1000 M Ω

Maximum panel thickness: .25 inch (6.35 mm) for .375 inch (9.5 mm) long bushing.

Model 7156: 2-Conductor (mono), .205" Faston terminals and .375" (9.5 mm) long bushing.

Model 7157: 3-Conductor (stereo), .375" long bushing.

Ordering Information

Model: 7156
Model: 7157

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.