



## Model 6304 Modular Probe Banana Tip for Hand Held DMM

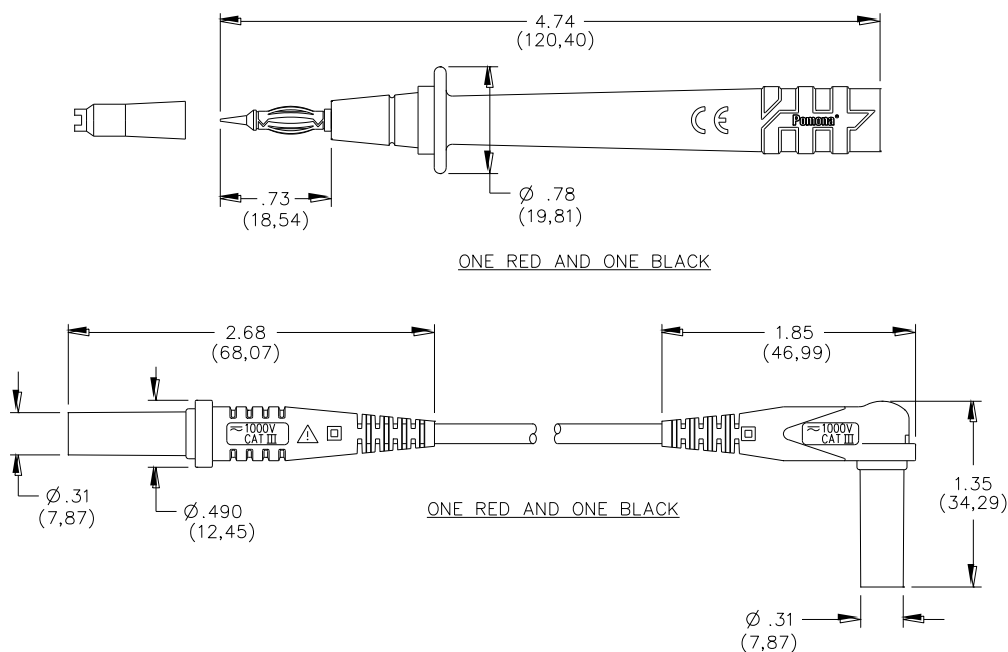

### FEATURES

- Fits Fluke, H-P, Tekronix, Wavetek and Amprobe DMM's with sheathed style safety jacks.
- Flexible test leads feature high strand count silicone wire for extreme flexibility and high temperature resistance. Banana plugs are double crimped to the wire and the plugs are molded directly to the wire for added pull strength.
- Wear indication with double insulated (dual extruded) silicone leads shows white inner layer for increased safety.

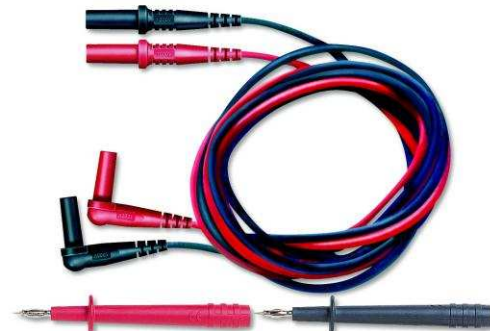

### MATERIALS

Probe: Insulation – Nylon 6, Fire Retardant, UL94 V-O Rated, Color: One Black, One Red

Banana Spring Probe Tip – Brass, Nickel Plated Body, Beryllium Copper Spring, Probe Cap-Nylon 6

Test Leads (Male to Male) – Multi-Stranded Wire: 18 AWG Silicone, Color: One Black, One Red

Banana Plug: Insulation: PVC, UL94 V-O, Color: One Black, One Red

### RATINGS

Voltage: IEC 61010-031, CAT III 1000 V (with protective cap), CAT II 1000 V (without protective cap)

Current: 10 Amperes

### ORDERING INFORMATION

Model 6304

Contains a set of one black and one red modular probe and test lead

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.