

SocketModem® iCell




Intelligent Cellular Modems for Verizon Wireless

The SocketModem® iCell intelligent cellular modem is a complete, ready-to-integrate communications device ideal for customers looking to add wireless communication or GPS tracking to their solutions.

The intelligence of the embedded Universal IP® stack allows for automatic/persistent connectivity for mission critical applications and enhanced M2M functionality.

Key Features & Benefits

- 2G and 3G CDMA models
- Universal Socket connectivity
- Intelligent Universal IP stack for enhanced M2M functionality
- Models with GPS tracking capability
- NMEA-0183 V3.01 compliant GPS messages
- Event monitoring and reporting via four programmable GPIOs
- Short Message Services (SMS)
- UFL antenna connectors
- Serial only or Serial/USB models
- Serial interface supports speeds up to 921.6K bps
- AT command compatible
- Two-year warranty

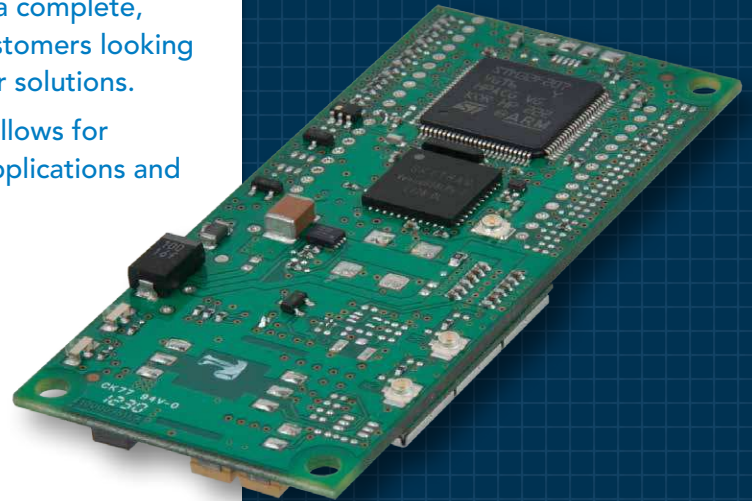

Verizon Wireless Specific Features

- **Approved by Verizon Wireless and regulatory agencies** saving customers time, money, and protection from the risks associated with pursuing their own certifications


Benefits

- Intelligent Universal IP stack for persistent/automatic connectivity and ease of network migrations
- Quick to market leveraging Multi-Tech's approvals
- Interchangeable communications devices for easy migration to future networks
- Long solution lifecycle reduces redesign time and cost
- High quality, reliable solution delivers on the promise of "M2M Simplified"
- Support from the leading experts in M2M technology

Your Devices & Data

- Transportation
- Energy
- Financial / Retail
- Healthcare
- Remote Monitoring

Connecting Your Devices

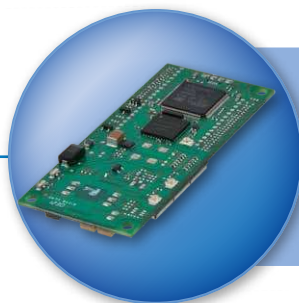

Verizon Network




Asset Management Platform

Insight + Action + Control



Alerts



Reports



Real-Time Management

Specifications

| Models | MTSMC-EV2-IP/GP MTSMC-EV3-IP/GP | MTSMC-C2-IP/GP |
|-----------------------|--|---|
| Performance | EV-DO Rev A | CDMA2000 1xRTT |
| Frequency Bands | 800/1900 MHz | |
| USB | USB 2.0 Full Speed | N/A |
| TCP/IP Functions | DNS resolve, FTP client, Ping, POP3 client, PPP | DNS resolve, FTP client, Ping, POP3 client, PPP |
| Connectors | EV2 Models: Up to 2 UFL (Cellular & GPS) EV3 Models: Up to 3 UFL (Cellular, Rx Diversity & GPS) | Up to 2 UFL (Cellular & GPS) |
| Dimensions | 3.15" x 1.375" (80.010 mm x 34.925 mm) | |
| Power Draw* | EV2-IP Models: 5VDC; 44mA sleep, 225mA typical, 770mA maximum EV3-IP Models: 5VDC; 83mA idle, 485mA maximum | IP Models: 5VDC; 100mA idle 689mA maximum GP Models: 5VDC; 173mA idle, 767mA maximum |
| Input Power | EV2 Models: 5VDC; EV3 Model: 3.3V - 5VDC | 3.3V - 5VDC |
| Environmental | | |
| Operating Temperature | -40° to +85° C | |
| Storage Temperature | -40° to +85° C | |
| Humidity | 20% to 90% RH, non-condensing | |
| Certifications | | |
| EMC Compliance | FCC Part 15 Class B | FCC Part 15 Class B |
| Radio Compliance | FCC Part 22, FCC Part 24 | FCC Part 22, FCC Part 24 |
| Safety | UL 60950-1 2nd ED, cUL 60950-1 2nd ED, IEC 60950-1 2nd ED | |

* See device guides for additional information.

Highlights

Applications

With increased 3G packet data rates, the SocketModem iCell intelligent cellular modem will support highly data-intensive applications such as remote video surveillance, multimedia POS/ATM terminals as well as other data-intensive applications. For asset tracking and fleet management applications, models with a dedicated GPS receiver are available.


Universal IP for Enhanced M2M Connectivity

Multi-Tech's Universal IP® stack consists of a common set of TCP/IP and other common modem functions that are implemented using a standard set of AT commands. The result for customers is reduced development time when using more than one cellular technology or when a cellular module/radio goes end-of-life. Multi-Tech products with Universal IP are designed for applications needing enhanced M2M communications connectivity, including:

- Auto Connect/Persistent Connectivity – Allows a modem to connect and stay connected without being managed by an intelligent device. It can also work with remote wake up to start a connection, as well as ping and TCP keep alive to keep the connection active.
- Device Monitoring – Acts as a watchdog to monitor and manage the connection. If the device becomes unresponsive, the device monitor can perform a reset to get it back to a known state.
- Event Monitoring and Reporting via GPIO – Uses general purpose input/outputs to monitor the state of a connected device. Universal IP can be configured to send status updates when the state of the connected device has passed pre-configured thresholds.

Universal Socket Connectivity

Multi-Tech's Universal Socket is a flexible, comm-port architecture that provides cellular, Ethernet, PSTN or Bluetooth® network access with interchangeable communications devices. This means you can utilize one system design and populate it with your connectivity device of choice accommodating multiple connectivity requirements. In addition, you are assured a seamless migration to future technologies.

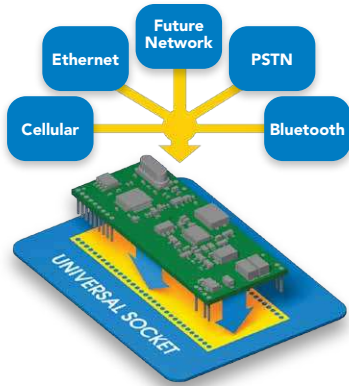

SocketModem iCell Pin-Out

The SocketModem iCell intelligent cellular modem interfaces easily with existing products through a standard serial or USB 2.0 interface. The serial channel is capable of transfer speeds up to 921.6K bps and can be interfaced directly to a UART or microcontroller. The complete on-board RF transceiver interfaces with an antenna for direct connection to wireless SMS or packet data networks. It also includes an onboard LED to display network status.

| | | | | |
|--------------|----|---|----|---------------|
| (I/O) Tip | 1 | ○ | 64 | SPKR (O) |
| (I/O) Ring | 2 | ○ | 63 | GND (O) |
| Safety Void | 3 | X | 62 | MICV (I) |
| (O) TX+ | 4 | ○ | 61 | VCC (I) |
| (O) TX- | 5 | ○ | 60 | -LED SPD (O) |
| (I) RX+ | 6 | ○ | 59 | -LED COL (O) |
| (I) RX- | 7 | ○ | 58 | -LED LINK (O) |
| Safety Void | 8 | X | 57 | -LED ACT (O) |
| | 9 | ○ | 56 | -LED FDX (O) |
| | 10 | ○ | 55 | |
| (O) TXCLK | 11 | ○ | 54 | |
| (O) RXCLK | 12 | ○ | 53 | |
| | 13 | ○ | 52 | |
| | 14 | ○ | 51 | GPIO (I/O) |
| | 15 | ○ | 50 | GPIO (I/O) |
| | 16 | ○ | 49 | GPIO (I/O) |
| | 17 | ○ | 48 | GPIO (I/O) |
| | 18 | ○ | 47 | |
| | 19 | ○ | 46 | |
| | 20 | ○ | 45 | |
| (I) | 21 | ○ | 44 | |
| (I) Mic+ | 22 | ○ | 43 | SPK+ (O) |
| (I) Mic- | 23 | ○ | 42 | SPK- (O) |
| (I) -Reset | 24 | ○ | 41 | GND (I) |
| (I) USB_VBUS | 25 | ○ | 40 | -DTR (I) |
| (I) GND | 26 | ○ | 39 | -DCD (O) |
| (I/O) USB_DP | 27 | ○ | 38 | -CTS (O) |
| (I/O) USB_DN | 28 | ○ | 37 | -DSR (O) |
| (O) LED DCD | 29 | ○ | 36 | -RI (O) |
| (O) LED RX | 30 | ○ | 35 | -TXD (I) |
| (O) LED DTR | 31 | ○ | 34 | -RXD (O) |
| (O) LED TX | 32 | ○ | 33 | -RTS (I) |

Developer's Kit

The Developer's Kit allows you to plug in the communications device and use it for testing, programming and evaluation. For a complete listing of the Developer Kit contents, visit www.multitech.com/pdfs/devkit.go

Ordering Information

EV-DO Models

| Product | Description | Region |
|--------------------|---|--------|
| MTSMC-EV3-IP-N3 | EV-DO Rev A Modem w/Universal IP (Serial - Verizon) | US |
| MTSMC-EV3-MI-IP-N3 | EV-DO Rev A Modem w/Universal IP (Serial & USB - Verizon) | US |
| MTSMC-EV3-GP-N3 | EV-DO Rev A Modem w/GPS (Serial - Verizon) | US |
| MTSMC-EV3-MI-GP-N3 | EV-DO Rev A Modem w/GPS (Serial & USB - Verizon) | US |

CDMA Models

| Product | Description | Region |
|----------------|---|--------|
| MTSMC-C2-IP-N3 | CDMA 1xRTT Modem w/Universal IP (Verizon) 5V Single or 50-Pack | US |
| MTSMC-C2-GP-N3 | CDMA 1xRTT Modem w/GPS (Verizon) 5V Single or 50-Pack | US |

Developer Kit

| Product | Description | Region |
|-----------|--|--------|
| MTSMI-UDK | Universal Socket Developer Kit Dev Board, Power Supply, Cables, Antennas and Docs | Global |

Services & Warranty

Multi-Tech's comprehensive Support Services programs offer a full array of options to suit your specific needs. These services are aimed at protecting your investment, extending the life of your solution or product, and reducing total cost of ownership. Our seasoned technical experts, with an average tenure of more than 10 years, can walk you through smooth installations, troubleshoot issues and help you with configurations. Products include a 2-year warranty.

Installation Support

Multi-Tech's Installation Support Service delivers priority service with the ability to work one-on-one with an experienced Multi-Tech technical support engineer, to guide you through the installation process for our products.

Technical Support Services

At Multi-Tech, we're committed to providing you personalized attention and quality service while providing you a quick response to your product support needs. We have several options of support for you to choose from.

For additional information on Support Services as well as other service offerings, please contact your Multi-Tech representative or visit www.multitech.com/support.go.

World Headquarters

Multi-Tech Systems, Inc.
2205 Woodale Drive
Mounds View, MN 55112 U.S.A.
Tel: 763-785-3500
Toll-Free: 800-328-9717
Email: sales@multitech.com
www.multitech.com

EMEA Headquarters

Multi-Tech Systems (EMEA)
Unit 1, Thames Court
2 Richfield Avenue
Reading, Berkshire RG1 8EQ
United Kingdom
Tel: +(44) 118 959 7774
Email: sales@multitech.co.uk

Produced in the U.S. of U.S. and non-U.S. components. Features and specifications are subject to change without notice.

Trademarks and Registered Trademarks: Multi-Tech and the Multi-Tech logo, SocketModem, Universal IP: Multi-Tech Systems, Inc. All other products and technologies are the trademarks or registered trademarks of their respective holders.

10/13 • 86002156-Verizon • © 2013 by Multi-Tech Systems, Inc. All rights reserved.

