


GU256X128D-3900B

SIMPLIFIED DATASHEET

Features

256x128 dot mid-sized model. Simple operation from single 5V power supply. 2:1 aspect ratio useful for graphic display applications.

Physical dimension

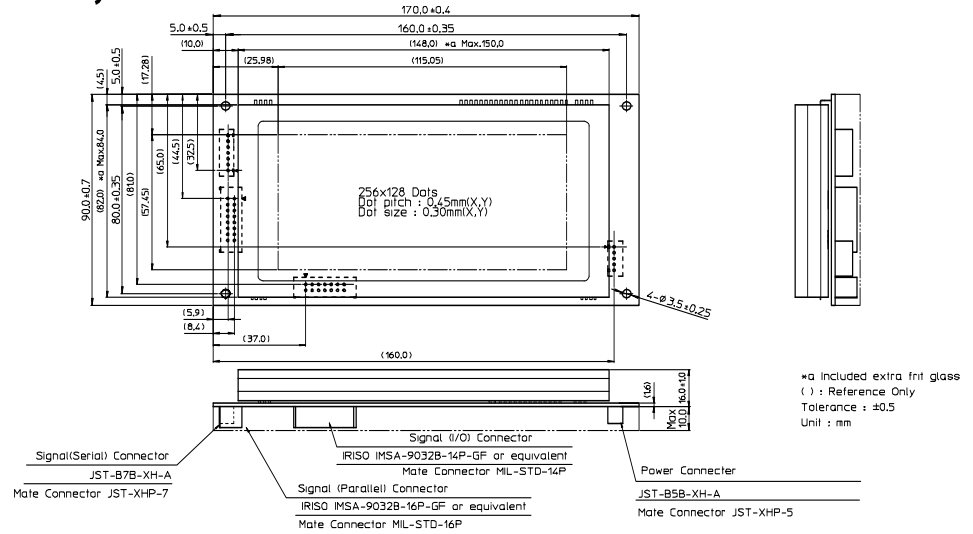

Get full specification



Click here to go to request form.

Specifications

Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC	4.75	5.00	5.25	VDC	-

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Parallel I/F						
Logic input current	I _{pIH}	-	-	1.0	μADC	-
D0-D7 /WR	I _{pIL}	-	-	-200	μADC	-
Logic input voltage	V _{pIH}	0.8VCC	-	VCC	VDC	-
D0-D7 /WR	V _{pIL}	0	-	0.2VCC	VDC	-
Logic output voltage	V _{pOH}	3.5	-	VCC	VDC	I _{OH} =-10 μA
RDY	V _{pOL}	0	-	0.6	VDC	I _{OL} =4mA
RS-232 I/F						
Logic input voltage	V _{sIH}	3	-	15	VDC	-
RXD, DSR	V _{sIL}	-15	-	-3	VDC	-
Logic output voltage	V _{sOH}	5	-	-	VDC	R _L =3KΩ
RXD, DSR	V _{sOL}	-	-	-5	VDC	-
Logic input Impedance	R _{sIN}	3	-	7	KΩ	-
General-purpose I/O port						
Power Supply Current 1	ICC1	-	1.2	1.6	ADC	All dots ON
Power Supply Current 2	ICC2	-	0.9	1.2	ADC	All dots OFF
Power Supply Current 3	ICC3	-	70	120	mADC	Display power OFF
Power Consumption	-	-	6.0	8.0	W	All dots ON

Optical Specifications

Parameter	Value
Luminance	250 cd/m ² Min. (500 cd/m ² Typ.)
Color of illumination	Green (Blue-Green)

Environmental Specifications

Parameter	Value
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (non-operating)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/s ² (40G) 9ms X-Y-Z, 3 times each direction

Physical Specifications

Parameter	Value
Number of Dots	32,768 (256 x 128)
Display Area	115.05 mm x 57.45 mm
Dot Size (X x Y)	0.3 mm x 0.3 mm
Dot Pitch (X x Y)	0.45 mm x 0.45 mm
Weight	About 346 g

Interface

Parallel(CMOS), Asynchronous Serial (RS232), I/O port

Pin Assignment

Pin No.	Signal	Pin No.	Signal
1	D7	2	D6
3	D5	4	D4
5	D3	6	D2
7	D1	8	D0
9	GND	10	/WR
11	GND	12	RDY
13	GND	14	GND
15	VCC	16	VCC

(Asynchronous Serial)

Pin No.	Signal	Baud Rate Setting
1	RXD	4800bps
2	DTR	9600bps
3	DSR	19200bps
4	TXD	38400bps*
5	TEST	57600bps
6	VCC	115200bps
7	GND	(*:Default setting)

(Power Connector)

Pin No.	Signal
1	VCC
2	GND
3	VCC
4	GND
5	TEST

(General-purpose I/O port: Abbreviation)

Selectable Font

Parameter	Value
ASCII, KANA	All Font Size
International	6 x 8 / 8 x 16 / 12 x 24 / 16 x 32 dot
2-byte character	16 x 16 dot
Japanese	32 x 32 dot
Character numbers	42 x 16 by 6 x 8 dot ASCII
	21 x 5 by 12 x 24 dot ASCII
	16 x 8 by 16 x 16 dot 2-byte character
	8 x 4 by 32 x 32 dot Japanese

Functions

Parameter	Value
Variable Character display	Variable Action Commands
Scroll function	Line / BOX Draw
Display Power Auto ON/OFF	AND/OR/XOR Mixture display
User Windows function	Program Macro function
I/O Port Control Function	Graphic DMA mode
Bit image by dot	
Variable stored settings	
etc.	