


GU140X16G-7003

SIMPLIFIED DATASHEET

Features

VFD module with same size and shape as LCD module. LED backlight models are also available, for additional display effect.

Physical dimension

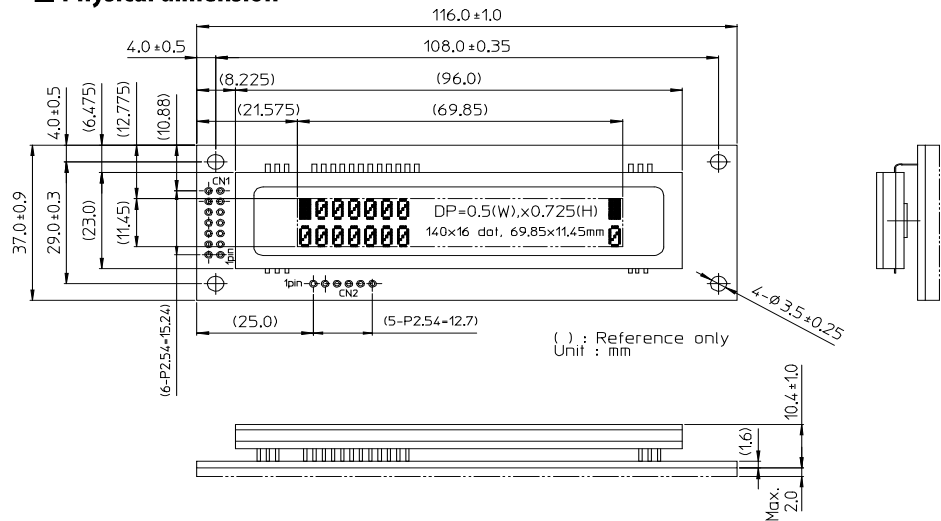

Get full specification



Click here to go to request form.

Specifications

Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC	4.75	5.00	5.25	VDC	-

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
'L' Logic Input Current SIN, SCK, /RESET	IIL	-	-	-0.6	mA	VIN=0V
'H' Logic Input Current SIN, SCK, /RESET	IiH	-	-	1.0	μA	VIN=5V
Logic Input Voltage SIN, SCK, /RESET	VIH	0.8VCC	-	VCC	VDC	-
	VIL	0	-	0.2VCC	VDC	-
Logic Output Voltage SBUSY	VOH	3.8	-	VCC	VDC	IOH=-1.5mA
	VOL	0	-	0.6	VDC	IOL=1.6mA
Power Supply Current 1	ICC-1	-	290	380	mADC	All dots ON
Power Supply Current 2	ICC-2	-	250	330	mADC	All dots OFF
Power Supply Current 3	ICC-3	-	35	45	mADC	Display power OFF
Power Consumption		-	1.45	1.9	W	All dots ON

Optical Specifications

Parameter	Value
Number of Dots	2,240 (140×16)
Character numbers	20 x 2 / Max23 x 2 by 5 x 7 dot ANK
Display Area	69.85 mm x 11.45 mm
Dot Size (X x Y)	0.35 mm x 0.575 mm
Dot Pitch (X x Y)	0.50 mm x 0.725 mm
Luminance	350 cd/m ² Min. (700 cd/m ² Typ.)
Color of illumination	Green (Blue-Green)

Environmental Specifications

Parameter	Value
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Storage Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (non-operating)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/s ² (40G) 9ms X-Y-Z, 3 times each direction

Character display

Parameter	Value
Number of Dots	140 x 16 dots
Character font type	5 x 7 ANK, International font
Character width	Fixed/Proportional character format 1&2
Attribution	Character magnify, Reverse
Weight	About 40 g

Interface

Sync/Asynchronous Serial (CMOS)

Pin Assignment (Synchronous Serial)

Pin No.	Signal
1	Vcc
2	SIN
3	GND
4	SBUSY
5	SCK
6	/RESET

(Asynchronous Serial)

Pin No.	Signal	Baud Rate Setting
1	Vcc	9600bps
2	SIN	19200bps
3	GND	38400bps*
4	SBUSY	115200bps
5	NC	(*:Default setting)
6	/RESET	

Functions

Parameter	Value
Control command	
Scroll display action	
Proportional Font function	
User-Windows function	
AND/OR/XOR Mixture display	
Reverse display	
Bit image display	
Character download function	
etc.	

