



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/04/11	B	ADDED DIM. 5.84 AND 1.04	T.B.	B.S.	
09/23/11	C	DIM. 3.55 WAS 2.54	T.B.	B.S.	
04/20/12	D	ADDED INSULATOR OUTLINE IN PCB LAYOUT	T.B.	B.S.	

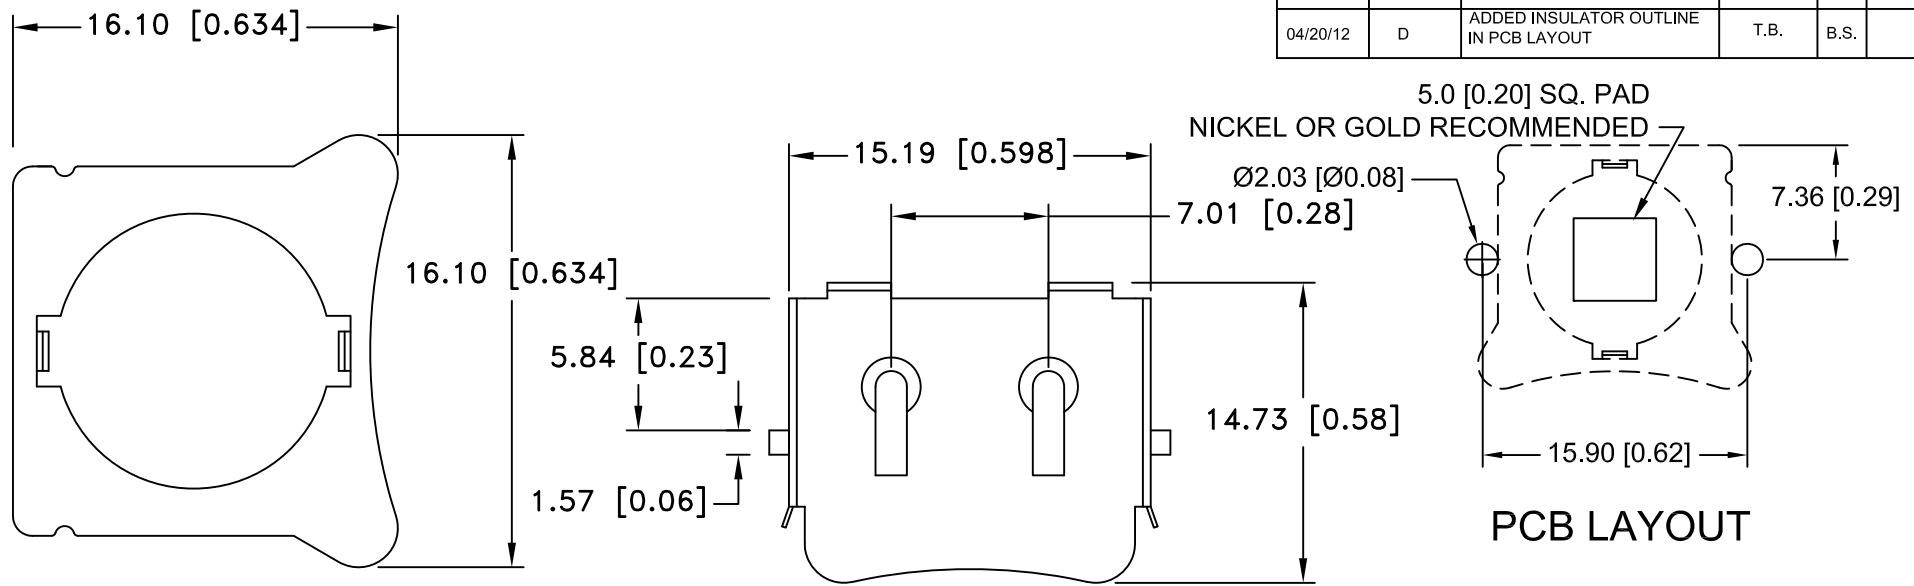

INSULATOR

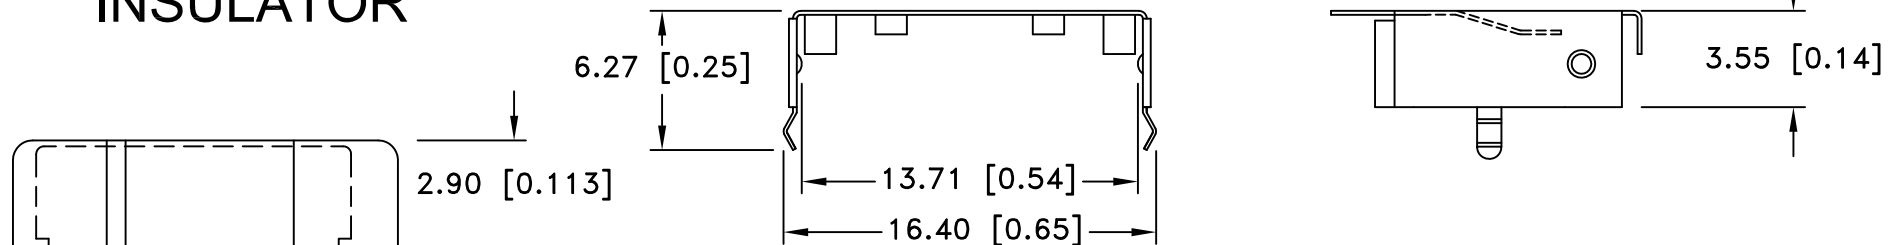

SPECIFICATIONS:

- * Holder material- Polypropylene, AV161 PP, Off White
- * UL Flamability Rating: UL 94-HB File No. E108370
- * Contacts : Phosphor Bronze C5191, Nickel Plated 80-150u thickness
- * Vibration test: 10-50-10 hz swept in 60 seconds
x,y,z direction: 1 hour each direction
- * Result: no dislodgement of the cell or damage
no discontinuity over 10 micro-seconds
- * Shock test: half sine wave acceleration 150g.
6 micro-seconds 3 shock pulses each direction per axis,
total of 18 pulses
- * Result: no evidence of physical damage
- * ROHS COMPLIANT

Tolerance (Except as noted)	MPD	Memory Protection Devices, Inc		
		200 Broad Hollow Road, Farmingdale, New York 11735		
decimal		Scale	Drawn By B.S.	
±.5 (.020)			Approved By T.B.	
Fractional	Title			
± .8 (.030)	CR1225 BATTERY RETAINER WITH INSULATOR			
Angular	Date	Drawing Number		
± 3°	04/20/12	BHX1-1225-PC		