




# PRODUCT DATA SHEET

**CATALOG NUMBER:** See table below  
**DESCRIPTION:** STOW twist-to-lock outdoor use "Y"-adapter cord set  
**APPROVALS:** UL Listed

### CONSTRUCTION PARAMETERS:

Conductors: 12 AWG bare copper, 65/30 stranding  
 Jacket material: PVC, yellow  
 Cord rating: Extra Hard Usage per the National Electrical Code  
 Cable temperature rating: -40 to +60 °C

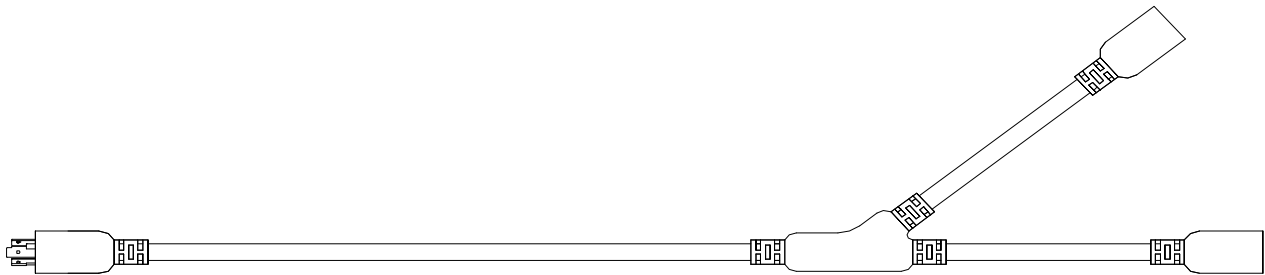

*Note: Plug and connector style may vary*

Cord set length: 3 ft total, 2 ft from plug to "Y"  
 Attachment plug configuration: NEMA L14-20P  
 Cord connector configuration: See table below  
 Plug and "Y" material: PVC, black  
 Cord connector material: PVC, clear with power indicator light

### ELECTRICAL PROPERTIES:

Nominal operating voltage: 125/250 VAC  
 Maximum operating current: 20 A

Catalog number	Cord connector configuration
01924	(2) NEMA 5-20R

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part. We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is the proprietary intellectual property of Coleman Cable Inc.. Any information contained herein shall not be disclosed to any party without the written consent of Coleman Cable Inc.

