



# Heyco-Flex™ II Liquid Tight Tubing


Flexible, Nonmetallic Liquid Tight Electrical Tubing



TRADE SIZE	PART NO. Black	DESCRIPTION	PART DIMENSIONS				STANDARD COIL LENGTH ft/coil
			A Outside Diameter		B Inside Diameter		
			in.	mm.	in.	mm.	
1/4	8449	HF2 1/4	.568	14,4	.395	10,0	100
3/8	8450	HF2 3/8	.700	17,8	.494	12,5	100
1/2	8451	HF2 1/2	.830	21,1	.632	16,1	100
3/4	8452	HF2 3/4	1.040	26,4	.830	21,1	100
1	8453	HF2 1	1.303	33,1	1.054	26,8	100
1-1/4	8454	HF2 1-1/4	1.645	41,8	1.395	35,4	100
1-1/2	8455	HF2 1-1/2	1.883	47,8	1.588	40,3	50
2	8456	HF2 2	2.358	59,9	2.033	51,6	50

Standard color black.  
Consult Heyco for Cut to Length Availability.

- Maximum flexibility; can be used in extremely tight quarters.
- Smooth inside for easier wire pulling.
- Lightweight and lower installed cost.
- Integral rigid and flexible PVC construction.
- Use with nylon Heyco-Flex Connectors: Straight, Snap-in, or Sweep. See pages 2-3, 2-4, and 2-5.
- Also use with Quick Twist Fittings. See pages 2-7, 2-8, 2-9, and 2-10.
- 1/4" thru 2" trade sizes.
- Resists corrosion, oil, and water.
- UV resistant.
- Suitable for use in high vibration or flexing applications:
  - Automotive Equipment
  - Computers and Peripherals
  - Fiber Optics
  - Lab Equipment
  - Lasers
  - Office Equipment
  - Processing Control and Monitoring Equipment
  - Robotics
  - White Goods
- Passes submersion test of 70 psi.
- **Voltage Rating: 300V.**
- Temperature rating 70°C (158°F).
- **Mounting brackets are available, see page 2-13.**
- **Order Part No. 8340, HF-28 Cutting Tool, for cutting Heyco-Flex tubing and conduit cleanly and evenly.**

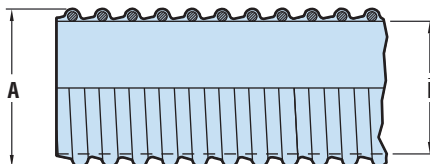

<b>Material</b>	PVC
<b>Certifications</b>	Recognized under the Component Program of Underwriters' Laboratories File E121095 Certified by Canadian Standards Association File 233010
<b>Flammability Rating</b>	VW1
<b>Temperature Rating</b>	-.4°F (-18°C) to 158°F (70°C)

Quick Specs