

1N4942 THRU 1N4948

FAST SWITCHING PLASTIC RECTIFIER

VOLTAGE - 200 to 1000 Volts CURRENT - 1.0 Ampere

FEATURES

- High surge current capability
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing Flame Retardant Epoxy Molding Compound
- Void-free Plastic in a DO-41 package
- 1.0 ampere operation at $T_A=55^\circ\text{C}$ with no thermal runaway
- Fast switching for high efficiency

MECHANICAL DATA

Case: Molded plastic, DO-41


Terminals: Axial leads, solderable per MIL-STD-202,
Method 208

Polarity: Band denotes cathode

Mounting Position: Any

Weight: 0.012 ounce, 0.3 gram

DO-41

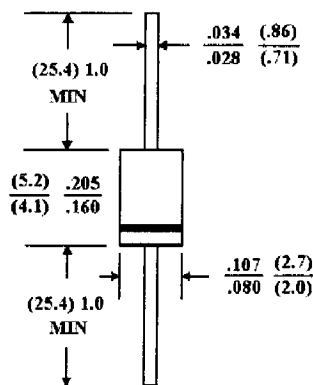

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	1N4942	1N4944	1N4946	1N4947	1N4948	UNITS
Maximum Recurrent Peak Reverse Voltage	200	400	600	800	1000	V
Maximum RMS Voltage	140	280	420	560	700	V
Maximum DC Blocking Voltage	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375"(9.5mm) lead length at $T_A=55^\circ\text{C}$	1.0					A
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load(JEDEC method)	30					A
Maximum Forward Voltage at 1.0A	1.3					V
Maximum Reverse Current $T_J=25^\circ\text{C}$	5.0					$^\circ\text{C}$ A
at Rated DC Blocking Voltage $T_J=100^\circ\text{C}$	500					$^\circ\text{C}$ A
Typical Junction capacitance (Note 1)	12					pF
Maximum Reverse Recovery Time(Note 2)	150	150	250	250	250	ns
Typical Thermal Resistance (Note 3) $R_{\theta\text{JA}}$	41					$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	-55 to +150					$^\circ\text{C}$

NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4.0 VDC
2. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$
3. Thermal resistance from junction to ambient and from junction to lead at 0.375"(9.5mm) lead length P.C.B. mounted



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.