



Model Number


IPC02-16

Code carrier

Features

- Battery-free code carrier
- 40 bit fix code
- Readable from both sides
- Protection degree IP68

Dimensions



Technical data

General specifications

Operating frequency	125 kHz
Transfer rate	2 kBit/s

Memory

Chip Type	EM4102 Unique (EM Microelectronic)
Type/Size	ROM 64 Bit (40 Bit code, 24 bit data security)
Read cycles	unlimited

Ambient conditions

Ambient temperature	-25 ... 85 °C (-13 ... 185 °F)
Storage temperature	-25 ... 100 °C (-13 ... 212 °F)

Mechanical specifications

Protection degree	IP68
Material	
Housing	Epoxy (black)

Compliance with standards and directives

Standard conformity	
Protection degree	EN 60529


Notes

The transponder can be read from either side.


Read/write distances

- ① IPH-18GM-V1 ③ IPH-F61 ⑤ IPH-FP-V1 ⑦ IPT1-FP-V1
- ② IPH-30GM-V1 ④ IPH-L2-V1 ⑥ IPH-F15-V1

Read distance in air IPC02-16

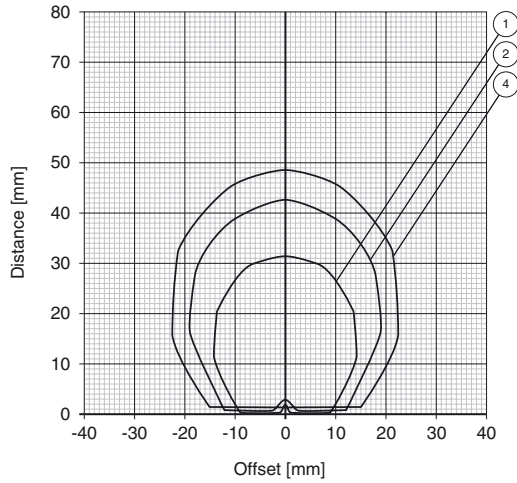


Reading range on aluminium IPC02-16

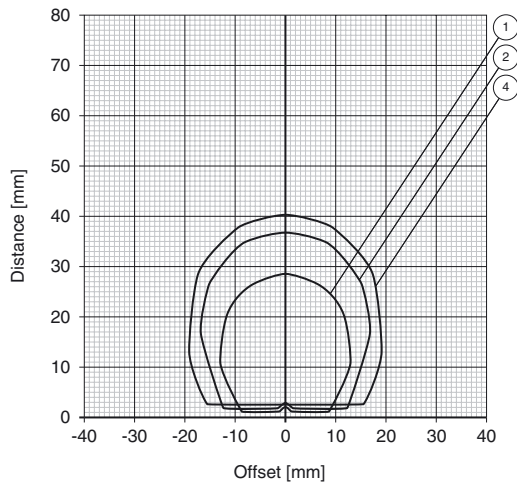

Release date: 2011-07-19 10:01 Date of issue: 2012-02-28 112426_eng.xml



Reading range on steel IPC02-16

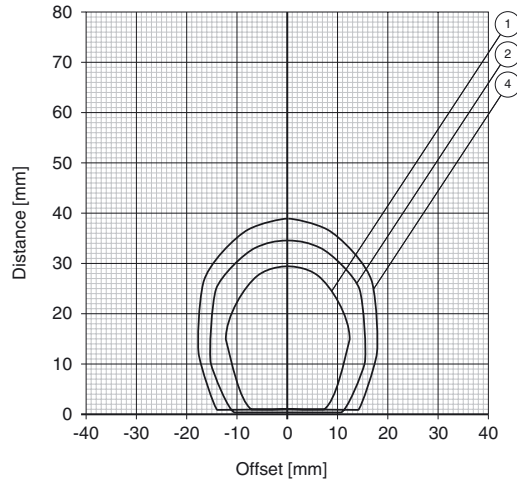

Release date: 2011-07-19 10:01 Date of issue: 2012-02-28 112426_eng.xml

Subject to modifications without notice

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411
fa-info@pepperl-fuchs.com

Copyright Pepperl+Fuchs

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com