ITEM NUMBER	CARRIER	TRIMMED	DIMENSION "A"	PLATING	
				CONTACT AREA	TAIL AREA
70984-1090	YES	NO	N/A	.000030/0.000762 MINIMUM GOLD OVER A NICKEL UNDERPLATE	.000100/(0.00254) MINIMUM TIN OVER A NICKEL UNDERPLATE
70984-1091	NO	YES	.130±.010/3.30±0.25	.000030/0.000762 MINIMUM GOLD OVER A NICKEL UNDERPLATE	.000100/(0.00254) MINIMUM TIN OVER A NICKEL UNDERPLATE
70984-1098	YES	NO	N/A	GOLD FLASH OVER A NICKEL UNDERPLATE	.000100/(0.00254) MINIMUM TIN OVER A NICKEL UNDERPLATE
70984-1099	NO	YES	.130±.010/3.30±0.25	GOLD FLASH OVER A NICKEL UNDERPLATE	.000100/(0.00254) MINIMUM TIN OVER A NICKEL UNDERPLATE

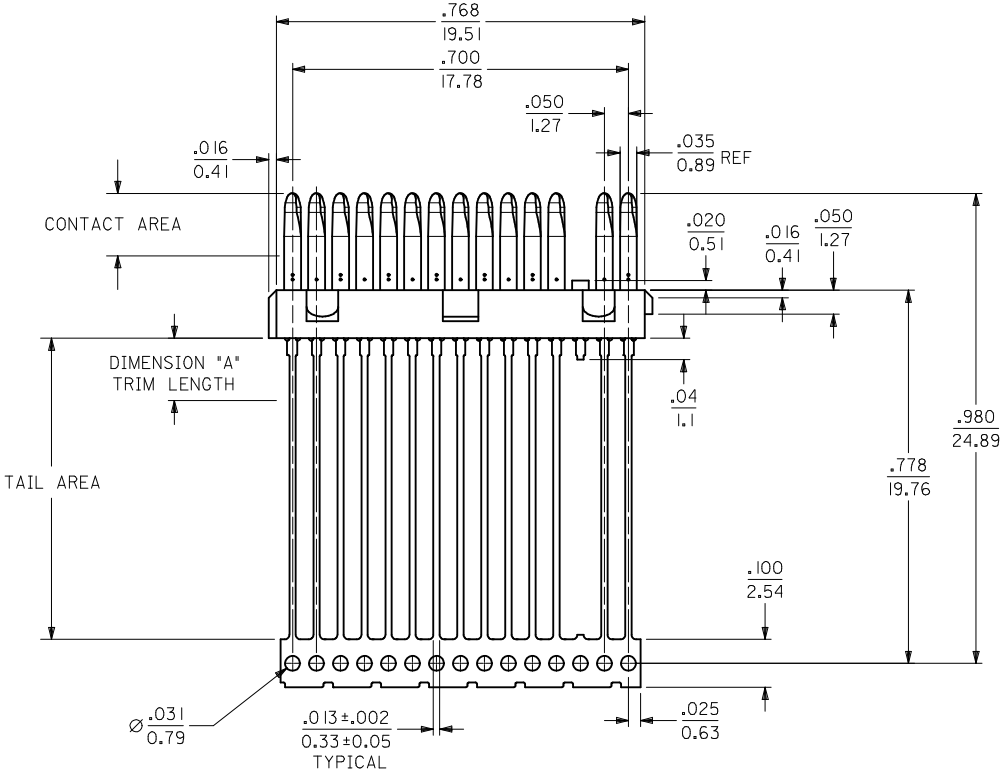

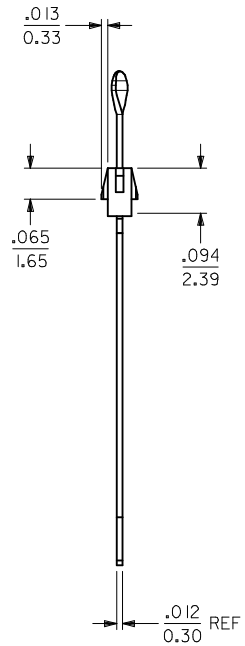

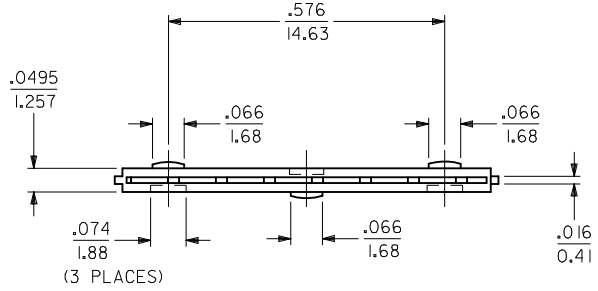

NOTES

1) MATERIALS:
INSULATOR: GLASS FILLED LCP (LIQUID CRYSTAL POLYMER), UL 94V-0, COLOR: BLACK.
TERMINAL: PHOSPHOR BRONZE, .012/0.30 THICK.
PLATING: SEE TABLE

2) FOR PART NUMBERS AND PLATING OPTIONS, SEE CHART.

3) PARTS CONFORM TO PRODUCT SPECIFICATION PS-75134-001.

4) PACKAGED PER SPECIFICATION PK-70873-0335 APPLIES.

ADD 30 GOLD OPTS
EC NO: UCP2014-4242 2014/04/14
DRWN:DMORGAN 2014/04/14
CHKD:MPOFF 2014/04/18
APPR:SMILLER 2014/04/18
DESCRIPTION
REV: C

QUALITY SYMBOLS
E =0
E =0
E =0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .015
1 PLACE	± 0.38	± ---
0 PLACE	± ---	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE:
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: DMORGAN DATE: 2002/10/17
CHECKED BY: BBARKER DATE: 2002/10/17
APPROVED BY: SMILLER DATE: 2014/04/18
MATERIAL NO.: SEE TABLE

TITLE: SALES 14 CKT DMS-59 PLUG INSERT MOLDED CONTACT

molex

DOCUMENT NO.: SD-70984-100
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION