


基板取付穴推奨寸法 (t=0.8)
RECOMMENDED P.C.BOARD HOLE DIM.(t=0.8)

適合ターミナル
APPLICABLE TERMINAL

注記
NOTE

- △ 適合ターミナル : 50061-8*00
50080-8*00
- △ APPLICABLE TERMINAL : 50061-8*00
50080-8*00

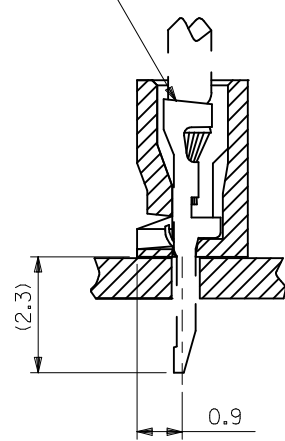

17.5	19.3	51022-1500	15
16.25	18.05	↑ -1400	14
13.75	15.55	-1200	12
12.5	14.3	-1100	11
11.25	13.05	-1000	10
8.75	10.55	-0800	8
6.25	8.05	-0600	6
5	6.8	-0500	5
3.75	5.55	-0400	4
2.5	4.3	↓ -0300	3
1.25	3.05	51022-0200	2
B	A	ENG. NO.	極致 CKT.NO.

材料 MATERIAL	ポリエステル、UL94V-0 POLYESTER,UL94V-0
仕上げ FINISH	—
適用電線範囲 WIRE RANGE	—
被覆外径 INS. RANGE	—

REVISED	EC NO: J2016-0794	2016/02/01
DRWN:KOMORI	2016/02/03	
CHKD:SAKIYAMA		
APPR:KASAKAWA	2016/03/01	
DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)	
REV	10 UNDER	±0.2
	10 OVER 30 UNDER	±0.25
	30 OVER	±0.3
	ANGULAR	±3 °
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE		SCALE	DESIGN UNITS
MM ONLY		10:1	METRIC
DRAWN BY	DATE	TITLE	
H. IJIMA	1996/05/29	1.25 BOARD IN CONN HSG	
CHECKED BY	DATE		
M. FUKUSHIMA	1996/05/29		
APPROVED BY	DATE		
M. ENOMOTO	1996/05/29		
MATERIAL NO.	DOCUMENT NO.	SHEET NO.	
	SD-51022-001	1 OF 1	
SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
A3			

THIRD ANGLE PROJECTION	
MOLEX INCORPORATED	
SEE CHART	