

New
SAW Filters



Part Number: CBPFS-0881
 Center Frequency 881.5 MHz
 Band Pass Width 25 MHz

Features:

- SAW Band Pass Filter
- 50 Ω SMA Connectors

Applications:

- Test Equipment
- Lab Use

Maximum Ratings:

- +36dBm (4 Watts)
- Operating Temperature: -40°C to 85°C
- Storage Temperature: -40°C to 85°C

Crystek's new line of SAW Band Pass Filters are designed in a rugged SMA housing. This filter line has excellent out-of-band rejection. Designed for Test Equipment and General Lab Use.



Product Control:


Crystek Part Number:	CBPFS-0881	Release Date:	18-Aug-11
Revision Level:	C	Responsible:	K. Piotrowicz




PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Center Frequency:		881.500		MHz
Pass Bandwidth:		25		MHz
Insertion Loss:		2.2		dB
Amplitude Ripple:		0.7		dB
Attenuation: DC – 779 MHz		55		dB
Attenuation: 779 – 849 MHz		50		dB
Attenuation: 914 – 951 MHz		28		dB
Attenuation: 951 – 1049 MHz		50		dB
Attenuation: 1049 – 2000 MHz		45		dB
VSWR:			2:1	
Impedance:		50		Ω
Operating Temperature Range:	-40		+85	$^{\circ}\text{C}$
Storage Temperature Range:	-40		+85	$^{\circ}\text{C}$

Schematic

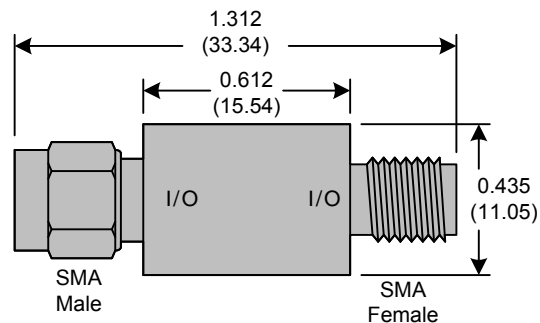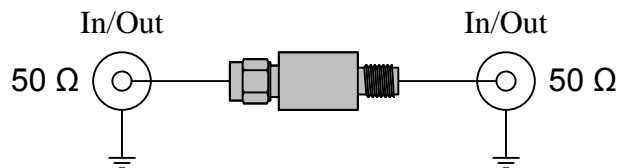



Typical Frequency Characteristics [close in]

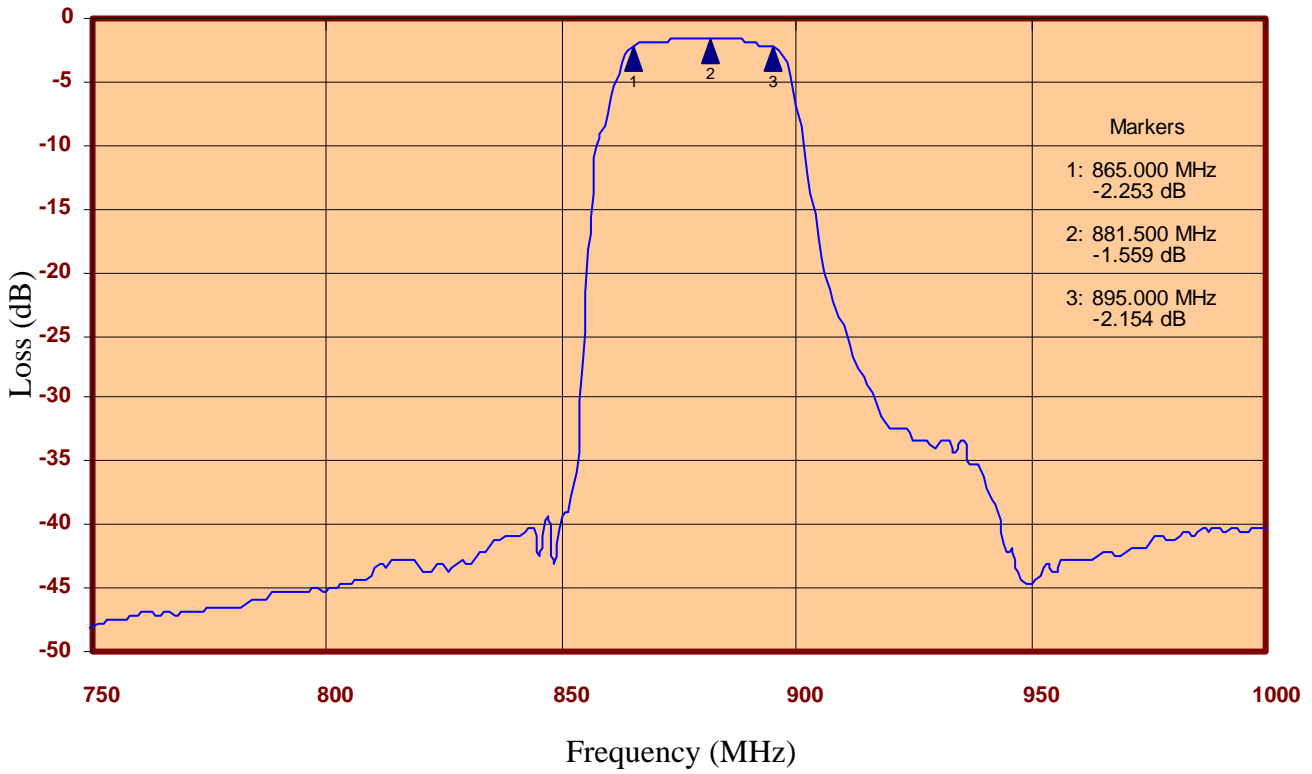

Typical Frequency Characteristics [full span]

